

Product Data Sheet

HDS 6/12 C

Compact 240V hot water high-pressure cleaner with eco!efficiency mode.

HDS compact class machines are designed to make high pressure cleaning more convenient and more economical than ever before. Their unique eco!efficiency mode ensures environmentally friendly and economical operation, with a reduced fuel consumption of 20% compared to previous models. With central one-button operation, these compact machines are easy to set-up, operate and cheap to run.



eco!efficiency



Features and Benefits:

- Ergonomic Easy Press gun with Softgrip and continuous Servo-Control pressure/ water flow adjustment with turnable stainless-steel spray lance
- Steam function
- Economical and environmentally friendly eco!efficiency mode, reducing fuel consumption and CO₂ emissions by 20%
- Tilting aid and large robust wheels for easy movement and effortless negotiating of obstacles such as steps and kerbs
- Intuitive set-up and operation with reduced trip hazards – hoses and cable at the back, controls at the front
- Large tank openings with integrated spout for easy filling
- Accurate cleaning agent dosing unit with automatic rinse function
- Lockable accessory compartment for nozzles and tools underneath the cover
- Large hooks for power cord and hose with additional storage space on the back of the machine, and secure lance holder
- Machine Protector system and 3-year burner coil warranty
- Easy service due to pump and motor positions
- Optional add-on hose reel




Range Comparison

Kärcher HDS Compact Class Hot Water High-Pressure Cleaners



Accessories

Standard accessories

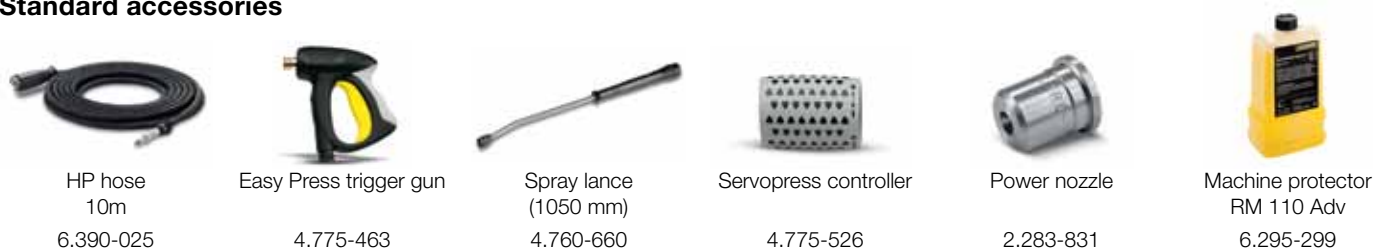

HP hose
10m
6.390-025

Easy Press trigger gun
4.775-463

Spray lance
(1050 mm)
4.760-660

Servopress controller
4.775-526

Power nozzle
2.283-831

Machine protector
RM 110 Adv
6.295-299

Optional accessories



Hose reel kit
2.642-756.0

Adapter, required
for hose reel kit
4.421-739.0

10m HP extension
hose (not for the
Hose reel)
6.391-417.0

10m HP extension
hose (not for the
Hose reel)
6.391-342.0

Coupling
for extension hose
4.403-002.0

Quick coupling
6.401-458.0

Plug nipple
6.401-459.0

Machine protector
RM 111 Adv
6.295-287

Technical Specification

| | HDS 6/12 C |
|------------------------------|--------------------|
| Power supply (Ph/V/Hz) | 1/240/50 |
| Water flow rate (l/h) | 240-560 |
| Operating Pressure (bar/MPa) | 30-120/3-12 |
| Max. temperature (°C) | 80/155 |
| Connected load (kW) | 3.0 |
| Consumption, fuel oil (kg/h) | 3.5 |
| Fuel tank (l) | 15.5 |
| Detergent tank (l) | 15.5 |
| Weight (kg) | 108.1 |
| Dimensions (L x W X H) (mm) | 1060 x 650 x 920 |
| Part number | 1.169-213.0 |