

metabo[®]
professional power tools & accessories



2010

Pocket Catalogue | Winter/Spring

4 - 11	Crosscut / Mitre Saws / Stands NEW!	21	Planer / Thicknesser Accessories
12	Crosscut / Mitre Saw Accessories	21 - 23	Site Saws
13 - 14	Band Saws	24	Chip and Dust Extractors
15	Band Saw Accessories	25	Log Splitters
16	Table Saws	26 - 32	Pumps
17 - 18	Precision Circular Saws	33 - 35	Compressors NEW!
19	Saw Accessories	36 - 37	Air Tools
19 - 20	Planer / Thicknessers	38 - 41	Blue Accessories
		42 - 43	Notes

Metabo - Renowned specialists for power tools

Metabo is a medium-sized brand-name manufacturer with operations in over 100 countries worldwide. Having manufactured in Germany since the launch of its first drill in 1924, Metabo is well known as a premium brand in the international electrical tool and machinery market.


With Metabo you can trust that our products are designed to perform, built to last and quality tested in the most extreme environments where conditions are often even more demanding than reality. In this we can assure you that our tools will deliver in all areas of the construction industry time and time again.

Time is money and quality pays dividends.

That's why professionals invest in Metabo.

Metabo XXL 3-Year Warranty

Metabo products are designed for a long and useful service life, but for added peace of mind on your investment we also offer you the extra long Metabo XXL 3 Year Warranty.

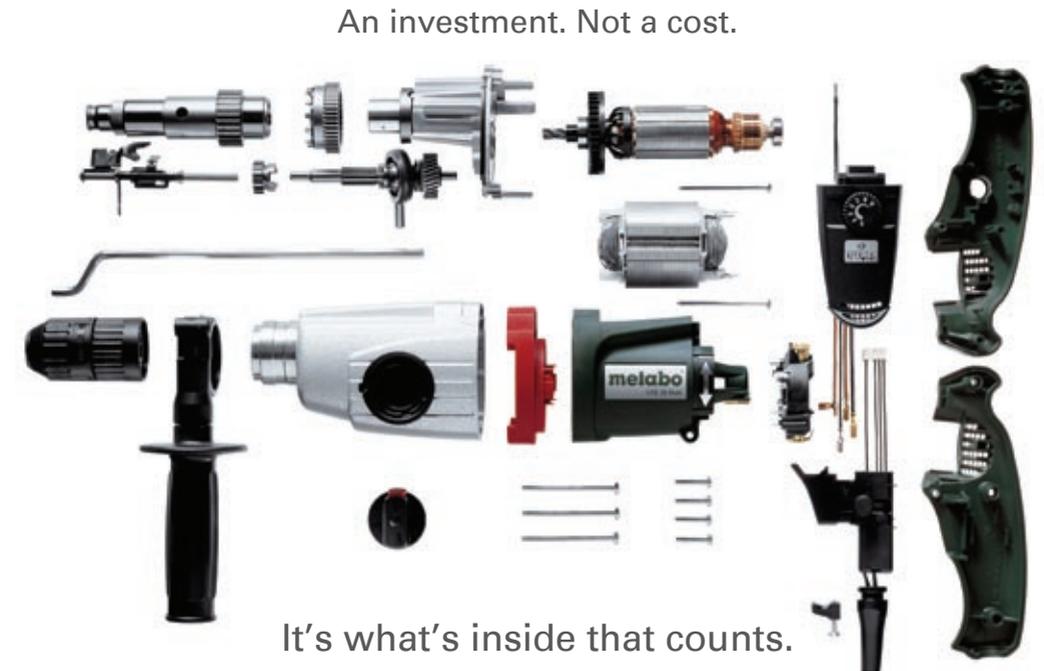

Did you know?

Metabo are the only manufacturer to offer an extended 3 year warranty on all machines, chucks, batteries and chargers!* If any of these items should fail within the warranty period Metabo will repair or replace these items free of charge (under Metabo's discretion). All purchases must be registered on-line at www.metabo.co.uk within 4 weeks of purchase to qualify. *Warranty only covers part failure due to faulty assembly or manufacture. It does not cover wear and tear or miss-use. Metabo Green and Blue machines come with a 1 year warranty as standard.

Metabo Symbols Key

3 year Lithium Online Warranty	CODE! Secure technology	Constant speed under load	Torque limiting slip clutch
Anti-Vibration Control Vibration dampening system	Autobalancing (lower vibration)	3 Mechanical Gears	4 Mechanical Gears
Protects battery and machine from overloading	Rotating Back Handle	Certified German standard	Vibration dampening handle

KS 216 Lasercut **NEW!**

The KS 216 is Metabo's smallest mitre saw designed for the woodworking enthusiast as well as the semi-professional. This is well designed machine that offers tremendous value. It comes supplied with an impressive array of standard equipment that you would normally have to pay extra for. These include strong cast aluminum table with left and right side extension rails inc length stops, work clamp, mains powered line laser, inbuilt work lamp and high adjustable rear fences. Ideal for laminate floor work, cutting 2"x 2" etc.

KGS 216 **NEW!**

The KGS 216 is a new slide mitre saw designed for the woodworking enthusiast as well as the semi-professional. This is a well designed, well thought through machine that offers tremendous value. With precision bearings on the support rails the KGS 216 will give clean, smooth cuts up to an impressive 305 mm in width and 65 mm in depth. As with the KS 216 it comes supplied with an impressive array of standard equipment that you would normally have to pay extra for. These include strong cast aluminum table with left and right side extension rails inc length stops, work clamp, mains powered line laser, inbuilt work lamp and high adjustable rear fences. Ideal for laminate floor work, cutting 2"x 3", outdoor decking, floor boards etc.

Mitre Saws



"The Metabo standard that starts where many others will end."

SPECIFICATIONS	
1,350 Watts	
Blade Diameter	216 x 30mm
Cutting Depth	90° - 65mm / 45° - 42mm
Cutting Width	90° - 120mm / 45° - 83mm
Mitre Left to right	47°-47°
Bevel Left to right	45°-45°
Weight	9.0kg

FEATURES	
Built in laser guide	
Integrated Work Lamp	
2 table length extensions	
Heavy duty work clamp	
Dust bag	
40 tooth blade and blade changing tool	

MACHINE ONLY	
Order Number	240V - 0102160000

Mitre Saws



"The Metabo standard that starts where many others will end."

SPECIFICATIONS	
1,500 Watts	
Blade Diameter	216 x 30mm
Cutting Depth	90° - 65mm / 45° - 36mm
Cutting Width	90° - 305mm / 45° - 205mm
Mitre Left to right	47°-47°
Bevel Left to right	45°-45°
Weight	14.0kg

FEATURES	
Slide Function	
Built in laser guide	
Integrated Work Lamp	
2 table length extensions	
Heavy duty work clamp	
Dust bag	
40 tooth blade and blade changing tool	

MACHINE ONLY	
Order Number	240V - 0102160100

Mitre Saws

KGS 254 NEW!

The KGS 254 is a new slide mitre saw designed for the woodworking enthusiast as well as the semi-professional. This is a well designed, well thought through machine that offers tremendous value and capacity. With precision bearings on the support rails the KGS 254 will give clean, smooth cuts up to an impressive 305 mm in width and 90 mm in depth. It comes supplied with an impressive array of standard equipment that you would normally have to pay extra for. These include strong cast aluminum table with left and right side extension rails inc length stops, work clamp, mains powered line laser, inbuilt work lamp and high adjustable rear fences. Ideal for laminate floor work, outdoor decking, cutting 3" x 3" post, floor boards etc.



"The Metabo standard that starts where many others will end."

SPECIFICATIONS	
1,800 Watts	
Blade Diameter	254 x 30mm
Cutting Depth	90° - 90mm / 45° - 47mm
Cutting Width	90° - 305mm / 45° - 205mm
Mitre Left to right	47°-47°
Bevel Left to right	45°-45°
Weight	17.5kg

FEATURES	
Slide Function	
Built in laser guide	
Integrated Work Lamp	
2 table length extensions	
Heavy duty work clamp	
Dust bag	
48 tooth blade and blade changing tool	

MACHINE ONLY	
Order Number	240V - 0102540000

KGS 255 PLUS

The KGS 255 PLUS is an 8 inch slide compound mitre saw with a 60mm depth of cut. Known for its robust design and precise cuts even when bevelling, this saw is at home on site as it is in the workshop. Special features include rugged design, quick and simple operation, 40 tooth blade for rapid cuts, depth stop for trenching, low weight for ease of transportation, quick stop motor - stops in under 5 seconds.



"Overall this is a high quality machine with good capacities that's still light enough to be taken wherever it is needed."
The Woodworker



SPECIFICATIONS	
1,300 Watts	
Blade Diameter	210 x 30mm
Cutting Depth	90° - 60mm / 45° - 30mm
Cutting Width	90° - 255mm / 45° - 177mm
Mitre Left to right	47°
Bevel Left to right	47° to -2°
Weight	17kg

FEATURES	
Flange mounted laser guide	
2 table length extensions	
Heavy duty work clamp	
Dust bag	
40 tooth blade and blade changing tool	

MACHINE ONLY	
Order Number	110V - 0102550139 240V - 0102550138

WITH UNIVERSAL STAND	
Order Number	110V - UK0102550139 240V - UK0102550138

WITH KSU STAND	
Order Number	110V - UK01025501391 240V - UK01025501381

Mitre Saws

Mitre Saws

Mitre Saws

Mitre Saws

KGS 303 PLUS

The KGS 303 PLUS is a 10 inch slide compound mitre saw with a 81mm depth of cut. The two parallel rails which support the motor and Bevel run on twin needle bearings giving a smooth seamless action. Special features include, arbour mounted laser to help improve cutting accuracy, high rear fence for extra support when dealing with large timbers, depth stop for trenching, quick stop motor – stops in under 8 seconds.

KGS 305

The KGS 305 is a 12 inch slide compound mitre saw with a 120mm depth of cut. The two parallel rails are offset to give extra support and accuracy through the cut (especially at maximum travel). Special features include, electronic motor brake to bring the blade to a stop in under 4 seconds, high rear fence for extra support when dealing with large timbers, heavy duty work clamp for workpiece stability and safety, quick 'flick away' depth stop for trenching. Can accept a 315mm blade giving possible cutting sizes of 335mm width by 106mm depth.

Mitre Saws



MACHINE ONLY	
Order Number	110V - 0103030039 240V - 0103030038

WITH UNIVERSAL STAND	
Order Number	110V - UK030300391 240V - UK030300381

WITH KSU STAND	
Order Number	110V - UK030300393 240V - UK030300383

METABO TIP!
"Ideal for cutting 3x3 inch fence posts / timbers,"

"As mitre saws go, this one is up there with the best. It is tough, light versatile and accurate with very good cutting for the jobbing builder or carpenter, and not at all out of place in a small workshop either."

Tool Business and Hire Magazine

SPECIFICATIONS	
1,800 Watts	
Blade Diameter	250 x 30mm
Cutting Depth	90° - 81mm 45° - 54mm
Cutting Width	90° - 300mm 45° - 200mm
Mitre Left to right	50° to 60°
Bevel Left to right	48°
Weight	19 kg

FEATURES	
Double bevel	
Removable high rear fence	
Flange mounted laser guide	
Extensive range of accessories	
48 tooth blade and blade changing tool	
Depth stop for trenching	
Slide function	



MACHINE ONLY	
Order Number	110V - 0103050039 240V - 0103050038

WITH UNIVERSAL STAND	
Order Number	110V - UK030500391 240V - UK030500381

WITH KSU STAND	
Order Number	110V - UK030500393 240V - UK030500382

METABO TIP!
"Excellent for cutting 4x4 inch fence posts / timbers"

SPECIFICATIONS	
2,000 Watts	
Blade Diameter	305 x 30mm
Cutting Depth	90° - 120mm 45° - 60mm
Cutting Width	90° - 320mm 45° - 226mm
Mitre left to right	50° to 60°
Bevel left to right	47°
Weight	29kg

FEATURES	
Double bevel	
2 table length extensions	
Heavy duty work clamp	
80 tooth blade and blade changing tool	
Extensive range of accessories	
Can take 315mm Ø blade - changing gap to 106 x 335mm.	
Slide function	

Mitre Saws

Mitre Saws

KGT 300

The KGT 300 is a 12.6 inch mitre / table saw with a 120mm depth of cut. This machine offers the user the benefit of having three machines in one. It can crosscut timbers to length at 90° up to 120mm in depth, then bevel all the way to 45° and cut up to 66mm in depth. In table saw mode the machine is ideally suited to ripping panels up to 55mm in depth, for example when cutting laminate flooring panels to size. Powerful 1,800 watt motor with soft start that stops in under 6 seconds.



SPECIFICATIONS	
1,800 Watts	
Blade Diameter	315 x 30mm
Cutting Depth	90° - 100mm 45° - 66mm
Cutting Width	90° - 170mm 45° - 112mm
Table Saw Cutting Depth	90° - 55mm
Mitre Left	50°
Mitre Right	60°
Weight	21kg



FEATURES	
Parallel guide/ripping fence	
Chip hood	
48 Tooth blade and blade changing tool	

"Capacities are its major advantage, with a 300mm blade you can rip 50mm thick timber through. Important if you use sawn stock. It gains an extra 30mm in width over its nearest rival on cross cut capacity. At 170mm it will cope with wider laminate flooring and deeper skirting, the only one on test with this capacity. Index positions on the compound angles are handy especially when mitring wide skirting."

Good Woodworking

Order Number	110V - 0103300039 240V - 0103300000
--------------	--

KSU 400 Mitre Saw Stand

FEATURES	
The telescopic arms extend on both sides	
Overall width of cut - 4 metres	
High-quality steel and aluminium design	
Lightweight stand, easy to transport weighing just 25kg	

Order Number	0910066110
--------------	------------



Sturdy side supports
The side supports are height adjustable, so they can be readily adapted to match the different crosscut saw types. Can also be used as a stop block for repeat cutting to length.

Mounting Rails
Long, laterally adjustable rails can be adjusted to take virtually any make and model of cross cut saws

Carrying Handle
A large carrying handle is mounted centrally under the stand, ensuring perfect balance and ease of transport. There are also handles at both ends, allowing the stand to be easily carried by two people.

Built-in table width extensions
The left and right extensions, running in steel telescopic guides, extend to give an overall width of 4 metres.

Height adjustable legs
The robust aluminium legs fold up quickly and conveniently. With height adjustment to compensate for uneven ground.

ROLLER CARRIER	
Order Number	0910064592

For long, wide boards. Easily transports and supports cut material on rollers.

WHEEL SET	
Order Number	0910064584

Moves the stand with the attached crosscut saw quickly and conveniently. Can also be used when the stands legs have been folded up.

SUPPORT LEG	
Order Number	0910064606

Provides additional support under table width extensions when cutting heavy workpieces. Ensures that the extension arms do not sag below the height of the crosscut saw support.

KGT 501

The KGT 501 is a 10 inch mitre / table saw with a 60mm depth of cut in chop saw mode or 81mm in table saw mode. The collapsible stand makes it ideal for handling large timbers either at knee or waste level. Professional, precise and robust with a strong frame design and a high quality, quiet running 2,000 watt maintenance free induction motor that comes with soft start and stops in under 6 seconds.



SPECIFICATIONS	
2,000 Watts	
Blade Diameter	250 x 30mm
Cutting Depth	90° - 60mm 45° - 45mm
Cutting Width	90° - 210mm 45° - 154mm
Table Saw Cutting Depth	90° - 81mm 45° - 54mm
Mitre Left	45°
Mitre Right	45°
Weight	45kg

"I was impressed with the accuracy of the saw - it cut perfectly square straight from the box. There's no denying that the KGT 501 is a superbly engineered machine, and one which is built to give years of problem-free performance."

New Woodworking



FEATURES	
Smooth, quiet Induction Motor	
Three function: Crosscut saw, mitre saw and table saw.	
Parallel guide/ripping fence	
Chip hood	
34 Tooth blade and blade changing tool	
Foldable stand	



Order Number	110V - 0102505034 240V - 0102505042
--------------	--

Images	Accessories Description	Part Number	
	for KGS 255 & KGS 255 PLUS		
	Table length extension profile, extendable	0910058878	
	Workpiece clamping device KGS 255 / 303 / 305 / KGT 300 / 501 / KS 210 C	0910057553	
	Wooden auxiliary fence KGS 255 / 303 / KGT 300	0910059831	
	KGS 255 PLUS Side Extension Rails	0910053230	
	KSU 400 Workstand Fits all compound and mitre saws	0910066110	
	KSU wheel set	0910064584	
	KSU support leg	0910064606	
		for KGS 301 and KGS 331	
		Table extension KGS 300 / 301 left 3000mm	0910003500
Table extension KGS 300 / 301 right 1660mm		0910006525	
Workpiece clamping device KGS 300 / 301 / 331		0910031228	
Chip and dust extractor unit KGS 300 / 301 / 331		0910003496	
	Table extension short KGS / KS left+right	0910053230	
	Positioning laser KGS 300 / 301 / 331 / KGT 500 / 501	0910040553	
	for KGS 301 and KGS 331		
	Length fence KGS 300 / 301 / 331	0910009010	
	Suction adapter for 100mm nozzle	0910031260	
	for KGS 303, KGS 303 PLUS and KGS 305		
	Collapsible machine stand with height compensation - KGS - DH	0910057529	
	Workpiece clamping device KGS 255 / 303 / 305 / KGT 300 / 501 / KS 210 C	0910057553	
	Chip suction unit KGS 303	0910057561	
	Chip and dust extractor unit TK 250 / KGS 305 / UK 333	0910061127	
	Suction adapter multi	0910058010	
	KGS 303-plus laser	0910063553	
	for KGT 300 & 501		
	Workpiece clamping device KGS 255 / 303 / 305 / KGT 300 / 501 / KS 210 C	0910057553	
	Suction port Adapter	0910058010	
Chip and dust extractor unit KGT 500 / 501	0910009249		
Positioning laser KGS 300 / 301 / 331 / KGT 500 / 501	0910040553		

The BAS 260 Swift is a small compact band saw with many features normally found on much larger band saws. The 100mm depth of cut and 245mm throat make it ideal for handling most small projects, ideal for where space or budget is limited. With a solid cast iron table that can tilt to 45°, top mount brass thrust roller bearings, bottom mount blade guides, rack and pinion guard depth adjustment, cam lock rip fence and a torsion-free welded all steel construction. The top and bottom doors come micro switched for user safety.

SPECIFICATIONS	
350 Watts	
Saw Table Tilt Range	0 - 45°
Cutting Depth	100mm
Throat Capacity	245mm
Cutting Speed	690m/min
Saw Blade Length	1,712mm
Support Surface	340 x 335mm
Weight	32.5kg

"Micro switching on the doors as well as a quick-to-remove fence rail makes blade changing painless, and with a maximum of ½ Inch blade width you can make decent cuts for straight work as well as intricate curved work."

Good Woodworking

FEATURES
A6 universal band saw blade
Support base
Parallel guide/ripping fence
Mitre guide
Precision three-pulley guide
Suction adapter



BAS 317 PRECISION PACKAGE

The popular BAS 317 band saw is built to meet the demands of the woodworking enthusiast / small workshop. The 165mm depth of cut and 305mm throat capacity make the machine capable of handling most everyday materials. Features include; a cast iron table that can bevel from -2° to 45°, brass thrust roller bearings, rack and pinion guard depth adjustment, cam lock rip fence with front and back lock on, mitre fence and stand. Two cutting speeds help make the machine suitable for cutting wood, plastics, thin wall aluminium profile. The top and bottom doors come micro switched for user safety.

SPECIFICATIONS	
900 Watts	
Saw Table Tilt Range	-2 - 45°
Cutting Depth	165mm
Throat Capacity	305mm
Cutting Speed	370/800m/min
Saw Blade Length	2,240mm
Support surface	548 x 400mm
Weight	70.5kg



METABO TIP!
"Excellent workshop machine. Band Saw set up is one key area to accurate cutting. Take extra care and attention here."

FEATURES
A6 universal band saw blade & stand
Parallel guide/ripping fence
Precision three-pulley guide
Suction adapter
Mitre fence
Set of 4 extra blades

Order Number UK903170381



Useful Information					
	KGS 255 PLUS	KGS 303 PLUS	KGS 305	KGT 300	KGT 501
Size (mm) L x W x H	1,020 x 508 x 470	575 x 855 x 595	1,180 x 1,040 x 690	575 x 760 x 730	620 x 663 x 878
Motor	Universal	Universal	Universal	Universal	Induction
Depth of Cut 90°/45°	90° - 60mm 45° - 30mm	90° - 81mm 45° - 54mm	90° - 120mm 45° - 60mm	90° - 100mm 45° - 66mm	90° - 60mm 45° - 45mm
Trenching	✓	✓	✓	✗	✗
Stand options	KGS stand & KSU 400	KGS stand & KSU 400	KGS stand & KSU 400	KGS stand & KSU 400	Built in - foldable
Bevel	Single	Double	Double	Single	Single
Laser guide	✓	✓	✗	✗	✗
Weight	17kg	19kg	29kg	21kg	45kg

Mitre Saws Accessories

Band Saws

Mitre Saws Information

Band Saws

Made in Germany, the BAS 505 is a robust, free standing precision band saw. With a 280mm depth of cut and a 440mm throat capacity this band saw is designed for serious use. Features include; cast iron table that can bevel to 20°, heavy duty brass thrust roller bearings, rack and pinion guard depth adjustment, sturdy cam lock rip fence, blade tension indicator. Four cutting speeds help make the machine suitable for cutting a variety of wood types, also plastics, aluminium profile and other soft metals. A micro switch on the door panel is fitted as standard for user safety.

Band Saws



SPECIFICATIONS	
1,500/1,900 Watts	
Table Tilt Range	0 - 20°
Cutting Depth	280mm
Throat Capacity	440mm
Cutting Speed	68/176/375/967 m/min
Blade Length	3,380mm
Support surface	536 x 640mm
Weight	146kg

FEATURES	
A6 universal band saw blade	
Parallel guide/ripping fence	
Precision three-pulley guide	
Extraction nozzle	
1 phase and 3 phase available	

Order Number	240V - 0090505038
--------------	-------------------

Order Number	400V - 0090505100
--------------	-------------------

Images	Accessories Description	Part Number
	for BAS 230	
	Belt blade Ind.hardened 1505x6x0.36 A4	0909040817
	Belt blade Ind.hardened 1505x12x0.36 A6	0909040825
	Belt blade Ind.hardened 1505x12x0.36 A2	0909040841
	for BAS 250 and BAS 260 Swift	
	Belt blade Ind.hardened 1712x6x0.36 A4	0909057175
	Belt blade Ind.hardened 1712x12x0.36 A6	0909057183
	Belt blade Ind.hardened 1712x12x0.36 A 2	0909057191
	for BAS 316 and BAS 317 Precision	
	Belt blade Ind.hardened 2240x12x0.5 A6	0909029244
	Belt blade Ind.hardened 2240x6x0.5 A4	0909029252
	Belt blade Ind.hardened 2240x15x0.5 A6	0909029260
	Belt blade Ind.hardened 2240x15x0.5 A2	0909029279
	BAS 317 set. 4 blade set	0908015100
	for BAS 500, BAS 600 and BAS 505	
	Belt blade Ind.hardened 3380x25x0.5 A6	0909000416
	Belt blade Ind.hardened 3380x25x0.5 A18	0909000424
	Belt blade Ind.hardened 3380x15x0.5 A6	0909029171
	Belt blade Ind.hardened 3380x6x0.5 A4	0909029180
	Belt blade Ind.hardened 3380x15x0.5 A2	0909029210
	Belt blade Ind.hardened 3380x13x0.65 A2	0909029228

Useful Information			
	BAS 260 SWIFT	BAS 317	BAS 505
Size (mm) L x W x H	525 x 425 x 840	665 x 795 x 1,600	834 x 639 x 1,860
Cutting depth	100mm	165mm	280mm
Table Tilt Range	0 - 45°	-2 - 45°	0 - 20°
Throat cutting capacity	245mm	305mm	440mm
Cutting speeds	690 m/min	370/800 m/min	68/176/375/967 m/min
Blade tension indicator	X	✓	✓
Weight	32.5kg	70.5kg	146kg

Band Saw Accessories

Band Saw Accessories

TS 250

The TS 250 is a compact table saw with a 77mm depth of cut. Weighing in at just 32kg the machine is designed for users who require workable capacities and a portable machine in one. Built primarily for site use the TS 250 is also popular in the workshop environment where space and budget are key influencing factors. Features include; rip fence with front and back lock on, v-groove mitre fence, negative bevel to -1.5° for undercuts and then positive to 46.5°, powerful universal motor with soft start. Various accessories are available for this machine.

PK 200 Package

The PK 200 is a compact precision table saw with a 65mm depth of cut. At home in the small workshop the PK 200 offers a good level of precision and flexibility for those who are tight for space or on a small budget, ideal for the serious home cabinet or furniture maker. The PK 200 comes with a wide range of accessories allowing the user to tailor a package to suit. The full PK 200 Package comes with all the main essentials - offering very good value for money.

Table Saw

SPECIFICATIONS	
2,000 Watts	
Table Size	755 / 985 x 645mm
Cutting Depth	90° - 77mm 45° - 52mm
Cutting Width Max. (from right hand side of blade to rip fence)	390mm
Blade Diameter	250 x 30mm
Bevel	-1.5° - 46.5°
Weight	32kg

FEATURES	
34 tooth carbide saw blade	
Parallel guide / ripping fence	
Mitre guide	
Table length extension	

PACKAGE FEATURES	
Extra 34 tooth carbide saw blade	
TS 250 stand	
Dust extraction kit	

MACHINE ONLY	
Order Number	110V - 0102502039 240V - 0102502038

MACHINE WITH STAND	
Order Number	110V - UK01025020391 240V - UK01025020381

PACKAGE	
Order Number	110V - UK0102502039 240V - UK0102502038



"There is little to criticise about this machine. It seems to me to be almost the ideal answer to the basic requirement for a home workshop set up where space is limited and is also very good on site too. I think it is worth the initial outlay and should give years of reliable service."

Router and Power Woodworking



Package.



STAND ONLY	
Order Number	0910061135



SPECIFICATIONS	
1,700 Watts	
Table Size	430 x 540mm
Cutting Depth	90° - 65mm 45° - 45mm
Cutting Width	180mm
Blade Bevel Range	-1.5 - 46.5°
Saw Blade	210 x 30mm
Weight	21kg

FEATURES	
30 tooth carbide circular saw blade	
Parallel guide/ripping fence	
Mitre guide	
Chip extraction connections	

PACKAGE FEATURES	
Work stand	
Sliding carriage	
Table side extension	
Base rail carrier system	
Dust extraction hose kit	

MACHINE ONLY	
Order Number	240V - 0102001010

PACKAGE	
Order Number	240V - UK0438001010



Package.



Table Saw

Precision Circular Saw

Precision Circular Saw

PK 255 Package

The PK 255 Package is an ideal semi-professional machine for the workshop. With a 80 mm depth of cut and 2,5Kw induction motor the machine is well suited to cutting a vast array of wood types. With the table width extension plus the machine can cut up to 700mm width on the right width extension. By using an extra base support extension (0910050028) cuts of upto 1,400mm in length are possible, 525mm without. *wheel kit (0910003313) shown not supplied as standard*



Precision Circular Saw

Precision Circular Saw

SPECIFICATIONS	
2,500 Watts	
Table Size	660 x 760mm
Cutting Depth	90° - 80mm 45° - 53mm
Mitre Cutting Width Max.	700mm
Cutting Length Max.	525-1,400mm
Bevel	0 - 45°
Saw blade	250 x 30mm

PACKAGE FEATURES	
34 tooth carbide circular saw blade	
Table rear extension	
Sliding Carriage with mitre - 1.55m long	
Table width extension	
Base rail carrier system	
Dust kit with hoses	

MACHINE ONLY	
Order Number	240V - 0102582209

PACKAGE	
Order Number	240V - UK0102582209

Precision Table / Circular Saw Accessories

Description	Part Number
TS 250 Accessories	
Workstand for TS 250	0910061135
Chip and dust extractor unit TK 250 / KGS 305 / UK 333	0910061127
Suction adapter for 100mm suction part	0910058010
PK Accessories	
Chip and dust extractor unit PK 200 / UK 220	0910017608
Sliding tables for basic support system PK 200 / UK 220	0910018434
Table width extension to the basic support system PK 200 / UK 220	0910018442
Accessories for Precision circular saws PK 255 and System circular saws PK 255	
Wheel set BKH / BKS / PK 255	0910003313
Chip and dust extractor unit PK 250 / PK 255	0910014374
Sliding table for basic support system PK 255	0910052420
Table width extension to the basic support system PK 255 / PKF 255	0910040480
Table extension UK 220 / PK 200 / PK 255 / PKF 255 / HC 333	0910018469
PK 300 Accessories	
Wheel set PK 300 / PKF 255	0910007262
Enclosed workstand PK 300 / PKF 255	0910050435
Wheel set for closed machine frame PK 300 / PKF 255	0910007262
Basic support system length extension cutting width up to 1400mm	0910050028
Table width extension to the basic support system PK 255 / PKF 255	0910040480
Table extension UK220 / PK200 / PK255 / PKF255 / HC333	0910018469

HC 333 G

The HC 333 is a professional level 14" planer/thicknesser with cast iron planer and thicknesser beds for stability and strength. This machine will give you the professional finish you require to make old or rough sawn timbers as good as new. The planer has a cutting width of 340mm and total table length of 1,240mm giving added support for larger timbers. Cutting depth is 3mm max. The thicknessing height is 180mm with a 3mm stock removal capacity.

SPECIFICATIONS	
2,500 Watts (240V) / 2,800 Watts (400V)	
Planing table L x W	1,240x 340mm
Thickness table L x W	550 x 310mm
Chip removal	0 - 3mm
Passage height / width	180/307mm
Feed Rate	5 m/min
No. Cutting blades	2

Available in 240V & 400V

FEATURES	
2 integrated HSS reversible planer blades	
Planer blade setter & jointing fence	
Chip ejection hood	
Extraction nozzle	

METABO TIP!
"Wax your beds regularly for consistent, smooth planing/ thicknessing time and time again. Make sure your dust hoods and micro switches are fully engaged before starting the machine."



Order Number	240V (2.5Kw) - 0113033363
Order Number	400V (2.8Kw) - 0113033380

Saw Accessories

Planer / Thicknesser

HC 260 C

Metabo were one of the first companies to develop a planer thicknesser of this size. With over 20 years of experience in this field you can trust that Metabo planer thicknessers are amongst the best in the market. The planer has a cutting width of 260mm and total table length of 1,090mm. Cutting depth is 3mm max. The thicknessing height is an impressive 160mm with a 3mm stock removal capacity. The thicknessing bed is cast iron, the planing tables are cast aluminium. The machine comes fully equipped with three micro-switches as well as kick stop on/off switch and quick release cable for machine and operator safety.



SPECIFICATIONS

2,200 Watts	
Planing table L x W	1,040 x 260mm
Thickness table L x W	400 x 260mm
Chip removal	3mm
Passage height/width	160/260mm
Feed Rate	5 m/min

FEATURES

Integrated disposable reversible planer blades
Short, swivelling jointing fence
Chip ejection hood
Extraction nozzle

"I was impressed with this compact planer. The build quality was great, as was the finish on the component parts. It's quiet for a planer too, and very user friendly. A neat and well put together machine - ideal for small home workshops and light work, but also quite capable of bigger work undertaken with care. A very pleasing buy."

Router and Power Woodworking

METABO TIP!

"Wax your beds regularly for consistent, smooth planing/thicknessing time and time again. Make sure your dust hoods and micro switches are fully engaged before starting the machine."

Order No. 0911001071

Order Number 240V - 0114026038

PLANER/THICKNESSERS

Description	Part Number
Universal Adapter for HC 260 M and HC 260 K	0913031288
Wheel set for HC 260 C / M	0911003783
Slot boring machine HC 260 M / K	0911003791
Eccentric clamping device	0910009680
Clamp stand HC 260 M / K	0911009811
Slot milling bits 6 / 8 / 10 / 12mm, right hand cutting	0911030497
Cutter block conversion kit HC 260 C / M / K, 2 piece	0911030845
Planer blades setting device for HC 333 G	0911016397
Wheel set for HC 333	0911053195
Table length extension	0910018469
Morticing attachment	0911053187

TKHS 315 C

Built with simplicity in mind the TKHS 315 C is capable of quickly cutting timbers up to 85mm in depth. This machine has been designed to be a basic workshop saw with generous cutting capacities. 24 tooth TCT blade and table rear extension supplied as standard.

SPECIFICATIONS


2,000 Watts	
Table Size	550 x 800mm
Cutting Depth	90° - 85mm 45° - 60mm
Saw Blade	ø 315 x 30mm
Dimensions L x W x H	1,650 x 650 x 1000mm
Weight	62kg

FEATURES

Quiet Induction motor for maintenance free use
24 tooth carbide saw blade
Wheel set
Universal guide
Rear table length extension (550 x 800mm)
Chip and dust extraction unit
Chip extraction connections



Please Note - The following site saw is part pre-assembled. 30 - 60 minutes set up time is required.

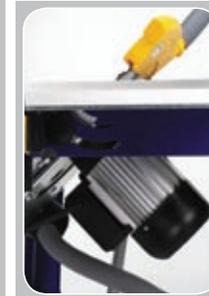

At 45° angle



Rise and fall

Order Number 240V - 0103152038

TKHS 315 M

Available in 240V and 110V the TKHS 315 M is the market leading site saw. With an 85mm depth of cut this saw is built to withstand the demands of the trade and hire industry. In the form of the PRO PACK the saw comes with a precise sliding table on bearing carrier and a side table extension capable of cross cutting panels up to 1,240mm in width. 24 tooth TCT blade and table rear extension supplied as standard.

Please Note - The following site saw is part pre-assembled. 30 - 60 minutes set up time is required.

SPECIFICATIONS	
2,500 Watts	
Table Size	600 x 800mm
Cutting Height	90° - 85mm / 45° - 53mm
Saw Blade	ø 315 x 30mm
L x W x H	1,700 x 700 x 1,000mm
Weight	75 Kg

FEATURES	
Smooth induction motor - maintenance free use	
24 tooth carbide saw blade	
Wheel set Rip fence	
Rear table length extension (600 x 800mm)	
Chip extraction connections	
Table side extension (PRO PACKAGE ONLY)	
Precision left hand sliding carriage on roller bearings (PRO PACKAGE ONLY)	

METABO TIP!
 "Top class site saw! Regular cleaning and maintenance will keep this machine running perfectly throughout its working life. Use Metabo maintenance and care spray (0911018691) to help prolong the life of threaded rods and sliding bearings etc."
List exc. VAT £5.89



MACHINE ONLY	
Order Number	240V - 0103153038

Order Number	110V - 0103153039
--------------	-------------------

PRO PACKAGE	
Order Number	240V - UK0103153038

Order Number	110V - UK0103153039
--------------	---------------------

Site Saw

Site Saw

Site Saw

Site Saw

SPA 1101

The SPA 1101 is the ideal companion for many stationary woodworking machines. The machine has a flow rate of 600m³/h, a bag capacity of 60 Litres and a filtration level of 0.5 micron. If working with potentially hazardous woods such as MDF or hard wood a 0.2 micron fine filter can be added as an optional extra. Supplied with 2.5 meters of hose.

METABO TIP!

"A very popular dust and chip extractor. Add the fine filter as an accessory to help protect you from potentially harmful dust debris. Particularly important for when working with mainly hard woods or MDF type materials."

SPECIFICATIONS

370 Watts	
Bag Volume	60 L
Cloth Bag Surface area	1.2m ²
Airflow Capacity	842 m ³ /h
Filtration Level	0.5 Micron
Weight	25 kg

FEATURES

Low noise
Plastic chip bag
2.5m hose
100m outlet

Why is it important to have a dust extractor?

- Wood dust can cause asthma. Carpenters and joiners are 4 times more likely to get asthma compared with the UK working population.
- Hardwood and man made board dust can cause cancer – particularly of the nose.
- Both hardwood and softwood dusts have a Workplace Exposure Limit (WEL) of 5mg/m³ which must not be exceeded. WEL's are limits on concentrations of dust in the air, averaged over 8 hours. But because wood dust is an asthmagen, exposure must be reduced as low as is reasonably practicable.

For more information please visit: www.hse.gov.uk/woodworking/dust.htm

Order Number	240V - 0130011012
--------------	-------------------



HS 5000 W

The HS 5000 W takes the time, effort and money out of having to have your logs split. This machine can be operated either at waist or floor level. With a 5 tonne splitting force, the machine can handle logs up to 250 mm Ø and 520 mm in length. Guide plates directly at the splitting point are also fitted for safe guidance of shorter wooden pieces.

SPECIFICATIONS

2,200 Watts	
Dimensions L x W x H	1,200 x 260 x 485mm
Splitting Force	5 Tons
Max. Split Length	520mm
Max. Stroke Height	320mm
Feed	4.5 cm/sec.
Return	9.5 cm/sec.
Weight	50kg

FEATURES

Collapsible mobile stand
Protected two-hand safety circuit
Guide plates



Order Number	240V - 0170005000
--------------	-------------------



SPA 2002

The SPA 2002 is the range leading dust and chip extractor. With the dust contained within the extractor the machine has been awarded with a GS H2 safety certificate, the machine has a filtration value of 0.2 mg/m³. The machine has a flow rate of 1,038m³/h and a 135 Litre bag capacity.

SPECIFICATIONS

1,400 Watts	
Bag Volume	135 Litres
Cloth Bag Surface area	3.45m ²
Airflow Capacity	1,038m ³ /h
Filtration Level	0.2 Micron
Weight	95kg

FEATURES

Low noise
Plastic chip bag
2.5m hose
100m outlet

How to control Dust

- Provide dust extraction at woodworking machines to remove dust before it can get breathed in.
- Keep the extraction and collection system maintained to make sure it continues to work efficiently.
- It is a legal requirement to have dust extraction equipment examined by a competent person at least every 14 months. (Your insurers or LEV supplier may have competent persons who can do this for you).
- Use a vacuum system to clear up wood dust – either a free standing vacuum cleaner or preferably a vacuum pipe attached to your extraction system. Using fine filters/twin filter systems with dust bags can help considerably.

For more information please visit: www.hse.gov.uk/woodworking/dust.htm

Order Number	240V - 0130200100
--------------	-------------------



HS 6001

Designed for handling larger logs the HS 6001 W can split 1,040mm long logs with ease with 6 tonnes of splitting force. The support table can also be adjusted to three different positions for when handling smaller pieces. Supplied with log clamps and safety hoops for protection of machine and user during and after splitting.

SPECIFICATIONS

3,500 Watts	
Dimensions L x W x H	860 x 930 x 1,040mm
Splitting Force	6 Tons
Max. Split Length	1,040mm
Max. Stroke Height	480mm
Feed	4cm/sec.
Return	14cm/sec.
Weight	125kg

FEATURES

3 adjustable levels
Foldable hoop
Protected two-hand safety circuit
Wheel set



Order Number	240V - 0170006001 400V - 0170006101
--------------	--

Metabo Pumps

The NEW Metabo pumps offer quality, performance and value across the extensive range.

With proven reliability and performance, the wide range includes, submersible pumps, flat suction submersible pumps, pressure pumps, dirty water pumps & two deep well pumps.

Innovation comes through the two Combi pumps which can handle dirty water with particles sizes up to Ø 30mm and can suck down to 1 mm (flat suction) leaving absolute minimal standing water.



Pumps

Pumps

Pumps

Pumps



TP 6600 S
Submersible pump



TP 8000 S
Submersible pump



TP 13000 S
Submersible pump



TDP 7501 S
Submersible pump



PS 7500 S
Submersible pump
for dirty water



PS 15000 S
Submersible pump
for dirty water



PS 18000 SN
Submersible pump
for dirty water



TPF 6600 SN
Flat suction submersible
pump for clear water



TPF 7000 S
Flat suction submersible
pump for clear water



TPS 14000 S Combi
submersible pump



TPS 16000 S Combi
submersible pump

TP 6600

Submersible pump for clear water. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes.



SPECIFICATIONS

250 Watts	
Max. Delivery rate	6600 l/h
Max. Delivery height	6 m
Max. Submersible depth	5 m
Max. Pressure	0.6 bar
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	4.3 kg

Order Number 0250660000

TP 7500 SI

Flat suction submersible pump - Purpose built for pumping out clear water from ponds, water butts etc. Inbuilt automatic float on/off switch makes it impossible for the float switch to catch on surrounding debris.



SPECIFICATIONS

300 Watts	
Max. Delivery rate	7500 l/h
Max. Delivery height	6.5 m
Max. Submersible depth	7 m
Max. Pressure	0.65 bar
Flat suction down to	2-3 mm
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	7.7 kg

Order Number 0250750013

TP 8000 S

Submersible pump for clear water with float on/off switch. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float switch and float switch level adjustment catch.



Order Number 0250800000

SPECIFICATIONS

350 Watts	
Max. Delivery rate	8000 l/h
Max. Delivery height	7 m
Max. Submersible depth	5 m
Max. Pressure	0.7 bar
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	4.3 kg

SPECIFICATIONS

450 Watts	
Max. Delivery rate	7000 l/h
Max. Delivery height	6 m
Max. Submersible depth	5 m
Max. Pressure	0.7 bar
Flat suction up to	2-3 mm
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	4.6 kg

TPF 7000 S

Flat suction submersible pump for clear water. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



Order Number 0250800002

TP 13000 S

Submersible pump for clear water with float on/off switch. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float switch and float switch level adjustment catch.



SPECIFICATIONS

550 Watts	
Max. Delivery rate	13,000 l/h
Max. Delivery height	9.5 m
Max. Submersible depth	5 m
Max. Pressure	0.95 bar
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	5 kg

Order Number 0251300000

TPF 6600 SN

Stainless steel flat suction submersible pump for clear water. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



SPECIFICATIONS

450 Watts	
Max. Delivery rate	6600 l/h
Max. Delivery height	6 m
Max. Submersible depth	5 m
Max. Pressure	0.7 bar
Flat suction up to	2-3 mm
Discharge Port	1 1/4" female thread
Pump housing	Stainless Steel
Power Cable	10 m
Weight	4.6 kg

Order Number 0250660006

TP 1200 SI

Flat Suction Pumps

Flat suction submersible pump for clear water. Built in automatic float on/off switch makes it impossible for the float switch to catch on surrounding debris.



Order Number	025120009
--------------	-----------

SPECIFICATIONS	
600 Watts	
Max. Delivery rate	11,700 l/h
Max. Delivery height	9 m
Max. Submersible depth	7 m
Max. Pressure	0.9 bar
Flat suction up to	2-3 mm
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	5.1 kg

PS 1500 S

Submersible pump for dirty water. This pump can handle dirty water for particle sizes up to 30mm in diameter. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



Order Number	025150000
--------------	-----------

SPECIFICATIONS	
850 Watts	
Max. Delivery rate	15000 l/h
Max. Delivery height	9.5 m
Max. Submersible depth	5 m
Max. Pressure	0.95 bar
Max. particle size	30 mm
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	6.5 kg

Dirty Water Pump

TDP 7501 S

Submersible high pressure pump with 3 impellers, float on/off switch with level adjustment and multi-adapter. Specialist high pressure pump designed for use with sprinkler and irrigation systems. Can handle up to 3 sprinklers at a time.



SPECIFICATIONS	
1,000 Watts	
Max. Delivery rate	7500 l/h
Max. Delivery height	34 m
Max. Submersible depth	7 m
Max. Pressure	3.4 bar
Discharge Port	1" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	9.1 kg

Order Number	0250750100
--------------	------------

SPECIFICATIONS	
1,100 Watts	
Max. Delivery rate	18,000 l/h
Max. Delivery height	11 m
Max. Submersible depth	7 m
Max. Pressure	1.1 bar
Max. particle size	35 mm
Discharge Port	1 1/2" female thread
Pump housing	Stainless Steel
Power Cable	10 m
Weight	7.8 kg

Top of the range stainless steel submersible pump for dirty water. This pump can handle dirty water for particle sizes up to 35 mm in diameter. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



Order Number	025180000
--------------	-----------

PS 1800 SN

Dirty Water Pump

PS 7500 S

Dirty Water Pump

Submersible pump for dirty water. This pump can handle dirty water for particle sizes up to 30 mm in diameter. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



Order Number	0250750000
--------------	------------

SPECIFICATIONS	
450 Watts	
Max. Delivery rate	7500 l/h
Max. Delivery height	5 m
Max. Submersible depth	5 m
Max. Pressure	0.5 bar
Max. particle size	30 mm
Discharge Port	1 1/4" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	4.8 kg

PS 2400 SG

Storm pump with extremely fast discharge rate of 24,000 l/h. This pump can handle dirty water with particle sizes up to 10 mm in diameter. Solid cast iron body machine uses Storz couplings. Supplied with float on/off switch and float switch level adjustment catch.



Order Number	0250240000
--------------	------------

SPECIFICATIONS	
1,100 Watts	
Max. Delivery rate	24,000 l/h
Max. Delivery height	11 m
Max. Submersible depth	10 m
Max. Pressure	1.1 bar
Max. particle size	10 mm
Discharge Port	Storz coupling
Pump housing	Cast Iron
Power Cable	10 m
Weight	18 kg

Storm Pump

TPS 14000 S Combi

Innovative Combi submersible pump for clear water (Inc. flat suction down to 1 mm) and dirty water with particle sizes up to 20 mm. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



SPECIFICATIONS	
770 Watts	
Max. Delivery rate	14,000 l/h
Max. Delivery height	8.5 m
Max. Submersible depth	7 m
Max. Pressure	0.85 bar
Flat suction up to	1 m
Max. particle size	20 mm
Discharge Port	1 1/2" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	7.7 kg

Order Number	0251400000
--------------	------------

TPS 16000 S Combi

Innovative Combi submersible pump for clear water (Inc. flat suction down to 1 mm) and dirty water with particle sizes up to 30 mm. Supplied with carry handle and angle connection with multi-adapter for fitting to different hose sizes, float on/off switch and float switch level adjustment catch.



SPECIFICATIONS	
970 Watts	
Max. Delivery rate	16,000 l/h
Max. Delivery height	9.5 m
Max. Submersible depth	7 m
Max. Pressure	0.95 bar
Flat suction up to	1 m
Max. particle size	30 mm
Discharge Port	1 1/2" female thread
Pump housing	Tough plastic
Power Cable	10 m
Weight	7.8 kg

Order Number	0251600000
--------------	------------

TBP 4000 M

TBP 5000 M

Deep well / Bore hole pumps suitable for great depths. With an integrated check valve so water cannot flow back into the pump.

TBP 4000 M	
Order Number	0250400055



SPECIFICATIONS	
750 Watts	
Max. Delivery rate	3,800 l/h
Max. Delivery height	55 m
Submersible depth	20 m
Max. Pressure	5.5 bar
Pump diameter	98 mm
Discharge Port	1"
Pump housing	Tough plastic
Power Cable	22 m
Weight	12 kg



SPECIFICATIONS	
1,000 Watts	
Max. Delivery rate	5,000 l/h
Max. Delivery height	60 m
Submersible depth	20 m
Max. Pressure	6 bar
Pump diameter	98 mm
Discharge Port	1"
Pump housing	Special steel
Power Cable	22 m
Weight	12.2 kg

TBP 5000 M	
Order Number	0250500050

Compressor Chart

Model	Stapeling	Spraying <small>water/oil</small>	Seal/lubricating	Inflating tyres	Blow guns	Drilling	Paint spraying	Impact wrench	Impact ratchet	Sawing	Chiselling	Sand blasting	Grinding
Classic-Air 255		●			●	●	●	x	x	x	x	x	x
Basic 240					●	●	●	x	x	x	x	x	x
Basic 265					●	●	●	x	x	x	x	x	x
Basic 300							●	x	x	x	●	x	x
Mega 350									●		●	x	x

●	Very well suited
●	Only under certain circumstances suitably
x	Not suitable for this application

Classic-Air 255 **NEW!**

The Classic-Air 255 is a 24 litre oil lubricated piston compressor, ideal for DIY use. Features include a pressure reducer with manometer for the exact adjustment of the working pressure, an additional manometer for tank pressure and universal coupling for fast and simple connection with all known European plug-in nipples. Ideally suited for nailing, stapling, tyre inflation, and spraying. For short periods of use, the Classic-Air 255 can also be used for drilling, painting and for use with blow guns.

SPECIFICATIONS	
Free air delivery	140 l/min
Effective delivery volume (at 8 bar working pressure)	120 l/min
Max. Pressure	8 bar
Rated input power	1.5 kW
Suction Rate	240 l/min
Max. Speed	2,850 rpm
Tank capacity	24 l
Sound pressure level (LpA)	87 dB (A)
Weight	27 kg



METABO FACT!
 "All Metabo compressors come with a 10 year tank warranty against rust!"

Order Number	240V - 0230025500
--------------	-------------------

Basic 240

The Basic 240 is a 24 litre oil free compressor using Metabo's PLS system. This maintenance free system comes with many advantages including better cold starting capability, lower running costs and 5% greater air output. The Basic 240 is ideal for nailing, stapling, tyre inflation, spraying and sealing guns. Also suited for short periods of use with drilling tools, paint sprayers and blow guns. Comes supplied with pressure reducer with 1 manometer for controlled tank pressure, 1 quick-action coupling and thermal motor protection.

METABO FACT!

"All Metabo compressors come with a 10 year tank warranty against rust!"

SPECIFICATIONS

Air displacement	220 l/min (7.8 cfm)
Free air delivery	110 l/min (3.9 cfm)
Effective delivery volume (at 7.2 bar working pressure)	100 l/min
Max. Pressure	8 bar (116 psi)
Rated input power	1.1 kW (1.5 hp)
Max. Speed	2,850 /min
Tank capacity	24 l
Sound pressure level (LpA)	85 dB (A)
Weight	21.5 kg



Order Number 240V - 0230022224
110V - 0230022240

Basic 300

The Basic 300 is a 50 litre, 10 bar compressor. With 10 bar of pressure the basic 300 is better suited to high air dependency tools such as spraying and drilling. It is also highly suited for use with nailers, staplers, drills, tyre inflators, blow guns, spraying and for use with sealing guns. It is suited for limited use for chiselling and painting. Comes supplied with filter pressure reducer with manometer for improved air quality and two quick action couplings.

METABO FACT!

"All Metabo compressors come with a 10 year tank warranty against rust!"

**50 LITRE!!!
10 BAR!!!**

SPECIFICATIONS

Air displacement	290 l/min (10.2 cfm)
Free air delivery	165 l/min (5.8 cfm)
Effective delivery volume (at 7.2 bar working pressure)	150 l/min
Max. Pressure	10 bar (145 psi)
Rated input power	1.85 kW (2.5 hp)
Max. Speed	2,850 /min
Tank capacity	50 l
Sound pressure level (LpA)	89 dB (A)
Weight	40 kg



Order Number 240V - 0230034206

Compressors

Compressors

Basic 265

The Basic 265 is a 50 litre oil free compressor using Metabo's PLS system. This maintenance free system comes with many advantages including better cold starting capability, lower running costs and 5% greater air output. The Basic 265 is ideal for nailing, stapling, tyre inflation, spraying, sealing guns and blow guns. Also suited for short periods of use with drilling tools and paint sprayers. Comes supplied with pressure reducer with 2 manometers for controlled working pressure and tank pressure display, 2 quick-action coupling and thermal motor protection.

METABO FACT!

"All Metabo compressors come with a 10 year tank warranty against rust!"

SPECIFICATIONS

Air displacement	235 l/min (8.3 cfm)
Free air delivery	135 l/min (4.8 cfm)
Effective delivery volume (at 7.2 bar working pressure)	125 l/min
Max. Pressure	8 bar (116 psi)
Rated input power	1.5 kW (2 hp)
Max. Speed	2,850 /min
Tank capacity	50 l
Sound pressure level (LpA)	88 dB (A)
Weight	25 kg



Order Number 240V - 0230022216

Mega 350

The Mega 350 is a robust workhorse which has been tried and tested for professional use. The powerful V-Belt 2 cylinder compressor delivers 10 bar pressure with 195 litres per minute (6.9 cfm) of free air. The Mega 350 is ideal for nailing, stapling, tyre inflation, impact wrenches, drilling, sawing, painting, spraying, sealing guns and blow guns. Also suited for short periods of use with chiselling and screw driving tools. Comes supplied with pressure reducer with 2 manometers for controlled working pressure and tank pressure display, 2 quick-action coupling, thermal motor protection, pressure switch with start up valve for good cold start, 2 rear inflatable tyres and two lock on front coasters.

METABO FACT!

"All Metabo compressors come with a 10 year tank warranty against rust!"

SPECIFICATIONS

Air displacement	290 l/min (10.2 cfm)
Free air delivery	195 l/min (6.9 cfm)
Effective delivery volume (at 7.2 bar working pressure)	165 l/min
Max. Pressure	10 bar (145 psi)
Rated input power	2.2 kW (3 hp)
Max. Speed	1,300 /min
Tank capacity	50 l
Sound pressure level (LpA)	78 dB (A)
Weight	52 kg



Order Number 240V - 0230035040

Compressors

Compressors

SR 1500 Set 1/2" Impact Wrench


Working pressure	6.2 bar
Air requirement	320 l/min
Loosening torque	365 Nm

Order No.	0901059721
-----------	------------

RS 220 Set 1/2" Impact Ratchet


Working pressure	6.2 bar
Air requirement	310 l/min
Loosening torque	40 Nm
Speed	110 /min

Order No.	0901006717
-----------	------------

RF 363 Tyre Inflator


Working pressure	7 bar
------------------	-------

Order No.	0901054622
-----------	------------

FB 2200 Spray Gun


Working pressure	4.5 bar
Air requirement	200 l/min
Nozzle Ø 1.5mm	
Plastic flow bowl - 0.5 l	

Order No.	0901054452
-----------	------------

BM 310 Air Drill with Geared Chuck


Working pressure	6 bar
Air requirement	440 l/min
Chuck capacity	2 - 10mm
Speed	2,500 /min

Order No.	0901006725
-----------	------------

SSP 166 Sand Blasting Gun


Working pressure	7 bar
Air requirement	300 l/min

Order No.	0901054517
-----------	------------

LPZ 6 Kit


Contains: Blow gun, tyre inflator, paint spray gun, tyre inflator nipple and curved hollow needle, fabric hose 5m

Order No.	0901054487
-----------	------------

LPZ 6 Kit


Contains: Blow gun, tyre inflator, paint spray gun and spiral hose.

Order No.	0901013845
-----------	------------

STS 630 Set With 10 Piece Bit Set


Working pressure	6.2 bar
Air requirement	340 l/min
Speed	22,000 /min

Order No.	0901054576
-----------	------------

BP 70 - Blow Gun


Working pressure	2 - 6 bar
Air requirement	100 - 200 l/min

Order No.	0901026726
-----------	------------

SA 200 Recoil (8m Hose)


With wall and ceiling mounting brackets	
Maximum pressure	12 bar

Order No.	0901054550
-----------	------------

ST 200 Swivel (30m Hose)


360° rotatable (highly flexible)	
Maximum pressure	12 bar

Order No.	0901054568
-----------	------------

SA 100 (20m Hose)


Maximum pressure	15 bar
------------------	--------

Order No.	0901054975
-----------	------------



WZ = Alternating teeth, FZ/TZ = Flat trapezoid tooth, FZ/TZ 5° incline = Flat trapezoid tooth with negative clamping angle
 DZ/HZ = Roof-hollow tooth, 2 NL = Secondary slot holder

Metabo Blade Groups

Power Cut

- For fast, coarse and semi-fine cuts with continuous feed rates
- Good cutting results for straight cuts in solid wood
- Partly usable for construction wood with nails and concrete residue
- With coated wood or other composites only coarse cut quality is possible

Precision Cut

- Very wide range of uses in woodworking
- For very good, clean results with straight or cross cutting in softwood and hardwood
- Well suited for solid and plywoods, chipboards, untreated, coated or veneered, MDF, composite materials
- The circular saw must have a high performance motor

Multi Cut

- Universal use for demanding materials
- For the highest standards in cutting quality e.g. laminate, plastic, aluminium, copper and bronze materials
- Ideally suited for many applications in interior work
- Perfect cutting results, also when crosscutting in solid wood, coarse, coated or veneered chipboards, MDF
- The circular saw must have a very high performance motor
- Requires steady and relatively slow feed rates



Site Saw

Description	Cut	Part Number
Saw blades for TKHS 315		
Saw blade chrome vanadium 315x1.8 / 1.8x30 T=56 KV	Yellow	628100000
Saw blade chrome vanadium 315x1.8 / 1.8x30 T=80 NV	Yellow	628101000
Saw blade tungsten carbide 315x2.8 / 1.8x30 T=20 FZ 22°	Yellow	628015000
Saw blade tungsten carbide 315x3.0 / 2.0x30 T=24 WZ 20° <i>Supplied as standard</i>	Yellow	628016000
Saw blade tungsten carbide 315x2.8 / 1.8x30 T=48 WZ 15°	Red	628056000
Saw blade tungsten carbide 315x2.8 / 1.8x30 T=48 WZ 0°	Red	628057000
Saw blade tungsten carbide 315x2.8 / 1.8x30 T=84 WZ 10°	Red	628058000

Precision Circular Saw


Description	Cut	Part Number
Saw blades for PK 200, UK220		
Saw blade tungsten carbide 210x2.4 / 1.6x30 T=30 WZ	Red	628036000
Saw blade tungsten carbide 210x2.4 / 1.6x30 T=42 WZ	Red	628039000
Saw blade tungsten carbide 210x2.4 / 1.8x30 T=40 WZ 0°	Red	628037000
Saw blade tungsten carbide 210x2.4 / 1.6x30 T=64 WZ	Green	628081000
Saw Blades for KGT 500 / 501 / 550, PK 255, PKU 250, PKF 255, PKF 255 V8, OPTAL 26, MAXI 26		
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=34 WZ 2NL	Red	628045000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=42 WZ 2NL	Red	628046000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=60 WZ 2NL	Red	628049000
Saw blade tungsten carbide 250x2.6 / 1.6x30 T=48 DZ/HZ 2NL	Red	0910031007
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=80 WZ 2NL	Green	628087000
Saw blade tungsten carbide 250x2.8 / 2.0x30 T=80FZ/TZ 5°neg. 2NL	Green	628088000
Saw blades for PK 300		
Saw blade tungsten carbide 300x2.8 / 1.8x30 T=28 WZ KNL	Yellow	628014000
Saw blade tungsten carbide 300x2.8 / 1.8x30 T=48 WZ KNL	Red	628051000
Saw blade tungsten carbide 300x3.2 / 2.2x30 T=60 DZ/HZ KNL	Red	628052000
Saw blade tungsten carbide 300x2.8 / 1.8x30 T=72 WZ KNL	Red	628053000
Saw blade tungsten carbide 300x2.8 / 1.8x30 T=96 WZ KNL	Green	628089000
Saw blade tungsten carbide 300x2.8 / 2.2x30 T=96 FZ/TZ 6°neg. KNL	Green	628090000
Saw blades for PKF 255 V8		
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=34 WZ 2NL	Yellow	628045000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=42 WZ 2NL	Red	628046000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=60 WZ 2NL	Red	628049000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=80 WZ 2NL	Green	628087000
Saw blade tungsten carbide 250x2.8 / 2.0x30 T=80FZ/TZ 5°neg.2NL	Green	628088000
Saw blade tungsten carbide 250x3.2 / 2.2x30 T=60 WZ 2NL	Red	628050000
Scribing saw blades HW 90x3.2 / 4.0 / 2.0x30 T=10 FK 2NL, Concial flat tooth for 3.2mm cutting width		0910052489

Table Saw

Description	Cut	Part Number
Saw Blades for TS 250		
Saw blade tungsten carbide 250x2.8 / 1.8x30 Z=34 WZ NL	Red	628045000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=60 WZ 2NL	Red	628049000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=80 WZ 2NL	Green	628087000
Saw blade tungsten carbide 250x2.8 / 2.0x30 T=80FZ/TZ 5°neg. 2NL	Green	628088000

Mitre Saw

Description	Cut	Part Number
Saw blades for KGS 255 and KS 210: 210mm blades		
Saw blade tungsten carbide 210x1.8 / 1.4x30 T=24 WZ	Yellow	628008000
Saw blade tungsten carbide 210x2.4 / 1.8x30 T=40 WZ 0°	Red	628037000
Saw blade tungsten carbide 210x2.4 / 1.6x30 T=64 FZ/TZ 5°neg.	Green	628082000
Saw blades for KGS 303, KGS 301 and KGS 331: 250mm blades		
Saw blade tungsten carbide 250x2.8 / 2.0x30 T=24 WZ 3°neg.	Yellow	628013000
Saw blade tungsten carbide 250x2.4 / 1.8x30 T=48 WZ 5°neg.	Red	628047000
Saw blade tungsten carbide 250x2.4 / 1.8x30 T=60 WZ 5°neg.	Red	628048000
Saw blade tungsten carbide 250x2.8 / 2.0x30 T=80 FZ/TZ 5°neg. 2NL	Green	628088000
Saw blades for KGS 305: 305 & 315mm blades		
Saw blade tungsten carbide 305x2.4 / 1.8x30 T=60 WZ	Red	628054000
Saw blade tungsten carbide 305x2.4 / 1.8x30 T=80 WZ	Red	628055000
Saw blade tungsten carbide 305x2.8 / 2.0x30 T=96 FZ/TZ 5°neg.	Green	628091000
Saw blade tungsten carbide 315x2.8 / 1.8x30 T=84 WZ	Red	628058000
Saw blade tungsten carbide 315x2.8 / 2.0x30 T=96 FZ/TZ 5°neg.	Green	628092000
Saw Blades for KGT 300 and 501		
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=42 WZ 2NL	Red	628046000
Saw blade tungsten carbide 250x2.8 / 1.8x30 T=80 WZ 2NL	Green	628087000
Saw blade tungsten carbide 250x2.8 / 2.0x30 T=80FZ/TZ 5°neg.2NL	Green	628088000

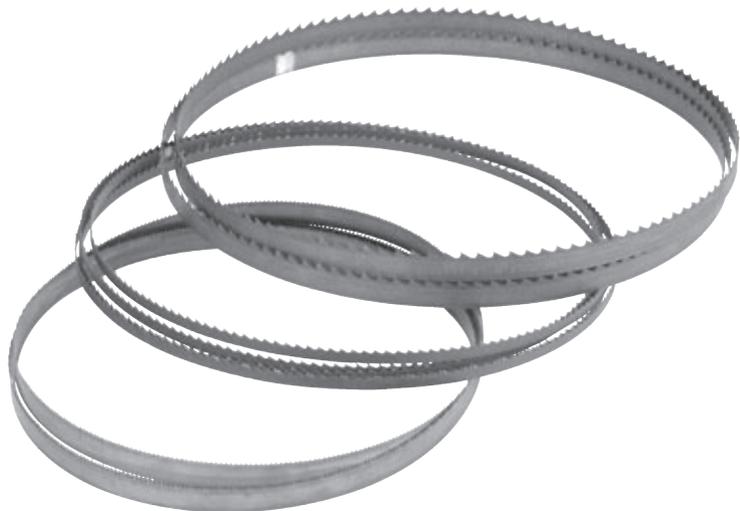

Bandsaw Blades

Description	Part Number
Saw blades for BAS 250 and BAS 260 Swift	
Belt blade Ind.hardened 1712x6x0.36 A4	0909057175
Belt blade Ind.hardened 1712x12x0.36 A6	0909057183
Belt blade Ind.hardened 1712x12x0.36 A 2	0909057191
Saw blades for BAS 316 and BAS 317 Precision	
Belt blade Ind.hardened 2240x12x0.5 A6	0909029244
Belt blade Ind.hardened 2240x6x0.5 A4	0909029252
Belt blade Ind.hardened 2240x15x0.5 A6	0909029260
Belt blade Ind.hardened 2240x15x0.5 A2	0909029279
BAS 317 set. 4 blade set	0908015100
Saw blades for BAS 500, BAS 600 and BAS 505	
Belt blade Ind.hardened 3380x25x0.5 A6	0909000416
Belt blade Ind.hardened 3380x25x0.5 A18	0909000424
Belt blade Ind.hardened 3380x15x0.5 A6	0909029171
Belt blade Ind.hardened 3380x6x0.5 A4	0909029180
Belt blade Ind.hardened 3380x15x0.5 A2	0909029210
Belt blade Ind.hardened 3380x13x0.65 A2	0909029228

Planer Blades

Description	Part Number
Saw blades for HC 260 C, HC 260 M, HC 260 K and multi 260	
HC 260 C/E/M, planer blade, disposable, 260x18.6x1mm, 2 units	0911030713
HC 260 C/M/K, planer blade HSS-18%W, 260x20x3mm / 2-Einstellnuten, 2 units	0911030721
HC 260 C/M/K, carbide-tipped planer blade 260x20x3mm / 2-Einstellnuten, 2 units	0911030730
Planner blade and retaining strip conversion set	0911030845
Saw blades for HC 300	
HC 300, planer blade HSS-18%W 304x25x3mm / 4 - Langlöcher, 2 units	0911060167
HC 300, carbide-tipped planer blade 304x25x3mm / 4 - Langlöcher, 2 units	0911060175
HC 300, planer blade, one-way turning planer blade, 304x24x1, 2mm, 2 units	0911060183
Blade holder for turning blade HC 300, 2 units	0911060191
Saw blades for HC 333 G	
HC 333, planer blade HSS-18%W 310x20x3mm / 2 setting grooves, 2 units	0911053179
HC 333, carbide-tipped planer blade 310x20x3mm / 2 setting grooves, 2 units	0911053160

Machine Stands and parts

Description	Part Number
Universal machine stand for KS 210 / KGS 255 / KGS 301 / KGS 303 / KGS 305 / KGS 331 / KGT 300 / DH 330	0910057529
Machine stand for KSU 400, suitable for all compound mitre saws	0910066110
KSU 400 Wheel set	0910064584
KSU 400 Roller support	0910064592
KSU 400 Side extension support legs	0910064606
KSU 400 Machine support rails (2 x rails in a pack - this is a spare part not an accessory)	1010730151

Adaptable accessories: Dust and Chip Extractors

Description	Part Number
Fine Filter for SPA1000 / SPA 1100 / SPA 1101 (0.2 Micron)	0913005058
Fine Filter for SPA 1700 D / SPA 1701 W / SPA 1702 W	0920016529
Fine Filter for SPA 2001 W / SPA 2001 D / SPA 2002 W / SPA 2002 D	0913059441
Dust extraction hose kit for KGS 301 / KGS 331	0910003496
Dust extraction hose kit for KGS 305 / TS 250 / UK 333	0910061127
Suction Adapter	0910059955
Suction Adapter Multi for KGS 255 / KGS 255 PLUS / KGS 305	0910058010
Suction Adapter kit KGS 303	0910057561
Cleaning Nozzle	0913031270
Transition Ring	0913031300
Suction Adapter Nozzles	0910031260
Universal Adapter	0913031288
Diversions (two-way Splitter)	0913031296
Y-Piece	0910060090
Suction Hose Kit 2.5m 100 mm dia. With 100 mm Transition ring & Universal adapter ring	0913010779
Quick connector ø 100 mm	7000604400400
Spare collectors bags (10 bags)	7000270201000
Filtering bag	7000270215500
Cone 100 -118 mm	7000270216900
Auto-start relay 1 Phase starts and stops the extractor automatically with the machine (not compatible with Hz machines)	7000267051400
Auto-start relay3 Phase starts and stops the extractor automatically with the machine (not compatible with Hz machines)	7000267051500

Adaptable accessories: Miscellaneous

Description	Part Number
Waxilit 70g - anti seize paste for beds and tables	0911001071
Silicon Spray Can: Spray for maintenance and care	0911018691
Work clamp for KGS 301	0910031228
Work clamp for KGS 255 / KGS 303 / KGT 300 / KGT 501 / KS 210 C / KS 210	0910057553
Lasercut	
Work clamp for KGS 255 PLUS / KGS 305 (this is a spare part not an accessory)	1010665805
Laser KGS 255 / KGS 255 PLUS	1010728840
Laser KGS 303	0910063553
Laser KGS 305	0910063952



