

## MITRE SAW CROSSCUTTING

For crosscutting applications. Blades have a negative hook angle, to minimise 'pick up' and 'snatching'.

**THREE  
NEW  
SIZES**




For easy setting up of mitre angles.




**Ref. ANGLEFIX**

See page 175.


### Triple chip tooth form

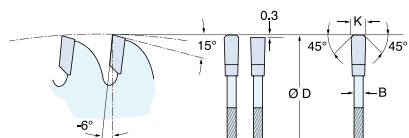


Hard wood & exotic rip



Soft wood rip



Plywood rip & crosscut



Chipboard laminated one-sided


## ALUMINIUM/PLASTIC & WORKTOPS

Blades have negative hook angle.

**NEW  
SIZE**



### Alternate top bevel tooth form

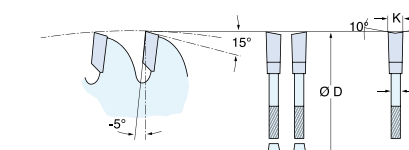

| Dia. mm | Dia. ins. Nom | No of Teeth | Bore mm | Bushing Washer mm | Kerf mm | Plate mm | Order Ref.            | Price  |
|---------|---------------|-------------|---------|-------------------|---------|----------|-----------------------|--------|
| 136     | 5 3/8         | 30          | 10      | -                 | 1.7     | 1.0      | <b>CSB/AP13630T*</b>  | £22.00 |
| 150     | 6             | 36          | 10      | -                 | 1.5     | 1.0      | <b>CSB/AP15036TB*</b> | £22.50 |
| 165     | 6 1/4         | 36          | 10      | -                 | 1.5     | 1.0      | <b>CSB/AP16536TA*</b> | £23.50 |
| 215     | 8 1/2         | 64          | 30      | -                 | 2.8     | 1.9      | <b>CSB/AP21564</b>    | £32.50 |
| 250     | 10            | 84          | 30      | 16/20/25.4        | 3.0     | 2.0      | <b>CSB/AP25084</b>    | £42.00 |
| 305     | 12            | 84          | 30      | -                 | 3.0     | 2.0      | <b>CSB/AP30584</b>    | £42.00 |
| 350     | 13 3/4        | 108         | 30      | -                 | 3.0     | 2.2      | <b>CSB/AP350108</b>   | £60.00 |


\*T=Anti-kickback with thin kerf for cordless saws.




For alloy cutting use a cutting lubricant such as TrendiWax®. Wear gloves and clamp material securely.

See page 161.

**Ref. TRENDIWAX**



Plastic



Alloy

## SPARE BUSHING WASHERS

| Outside Dia. (OD) mm | Inside Dia. (ID) mm | Thickness mm | Order Ref.       | Price |
|----------------------|---------------------|--------------|------------------|-------|
| 20                   | 12.7                | 1.1          | <b>CSB/BW27</b>  | £1.00 |
| 20                   | 16                  | 1.1          | <b>CSB/BW17</b>  | £1.00 |
| 30                   | 16                  | 1.1          | <b>CSB/BW45</b>  | £1.00 |
| 30                   | 16                  | 1.5          | <b>CSB/BW45A</b> | £1.00 |
| 30                   | 16                  | 1.7          | <b>CSB/BW45B</b> | £1.00 |
| 30                   | 20                  | 1.1          | <b>CSB/BW15</b>  | £1.00 |
| 30                   | 20                  | 1.5          | <b>CSB/BW15A</b> | £1.00 |
| 30                   | 20                  | 1.7          | <b>CSB/BW15B</b> | £1.00 |
| 30                   | 25                  | 1.5          | <b>CSB/BW12A</b> | £1.00 |
| 30                   | 25                  | 1.7          | <b>CSB/BW12</b>  | £1.00 |
| 30                   | 25.4                | 1.7          | <b>CSB/BW14</b>  | £1.00 |



Use 1.1mm thick for blades up to Ø 180mm  
Use 1.5mm thick for blades Ø 190-235mm  
Use 1.7mm for blades Ø 250mm

Bushing washers supplied to reduce bore diameter for certain makes and models of saw. Bushing washers must be pressed or glued into blade body.