


WHAT'S IN THE BOX?

CAUTION: Please read these assembly instructions fully **BEFORE** attempting to assemble this cart.

Failure to comply with these instructions may result in injury.

This cart is not a toy. Do not allow children to play with this cart at any time.

Save these instructions for further reference.

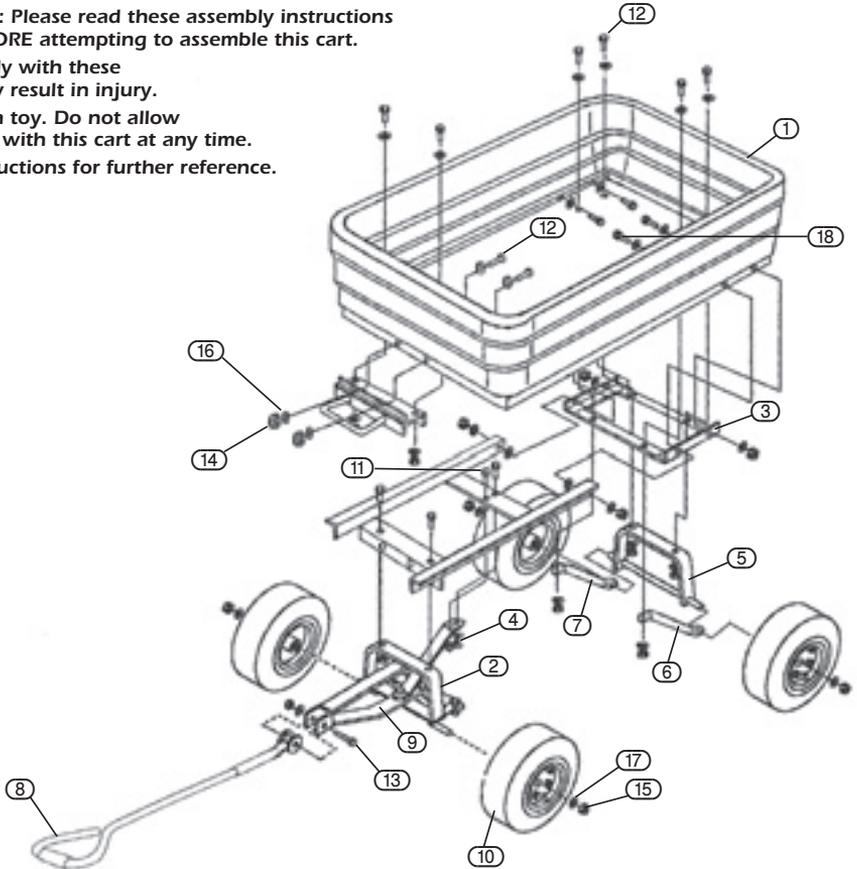

- | | | |
|---------------------------|----------------------------------|--------------------------------|
| ① Hopper. | ⑧ Handle. | ⑮ Lock nut M12. |
| ② Front frame. | ⑨ Coupling. | ⑯ Washer ID 8mm. |
| ③ Rear frame. | ⑩ Wheel. | ⑰ Washer ID 12mm. |
| ④ Front bracket assembly. | ⑪ Bolt M8 x 20 (x2). | ⑱ Round head bolt M8 x20 (x6). |
| ⑤ Rear bracket. | ⑫ Round head bolt M8 x 15 (x10). | |
| ⑥ Left rear brace. | ⑬ Round head bolt M8 x 60. | |
| ⑦ Right rear brace. | ⑭ Lock nut M8. | |

1. READ ALL INSTRUCTIONS CAREFULLY BEFORE USE.
2. Do not load the garden cart with more than 150kg. Do not use the tipping feature of the garden cart with more than 150kg.
3. This cart is not a toy. Do not allow children to play with this cart at any time.
4. Always distribute payload evenly over the surface of the bed.
5. Do not load any items on the top edges of the hopper.
6. If any parts become damaged, broken, or misplaced, do not use until replacement parts can be obtained.
7. Do not operate or use on objects that can cause damage to the pneumatic tyres or tubes. Do not inflate tyres to more than 30psi (2.1bar).
8. SAVE THESE INSTRUCTIONS!

As your garden cart requires assembly, first check off the included parts and fittings against the listings on page 1 – ‘What’s in the box?’ section.

Tools required for assembly include:



Plain slot
screwdriver.



Cross slot
screwdriver.



12/13mm
spanner.




Socket and
bit set.

*Tools above are sold separately and shown for visual guidance only.

STEP 1.


Assemble the front bracket to front frame using M8 x 20 bolts (11), round head bolts M8 x 15 (12), M8 lock nuts (14) and washers (16).

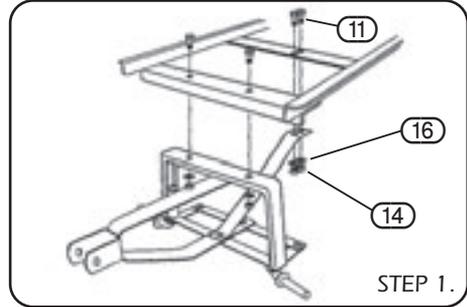

STEP 2.


Fix rear frame (3) to the rounded end of the hopper using 2 round head bolts M8 x 15 (12) in the rear holes.

Fit left & right brace (6) (7) over the spindle and secure to the frame and hopper using round head M8 x 20 bolts (18), M8 lock nuts (14) and washers (16).

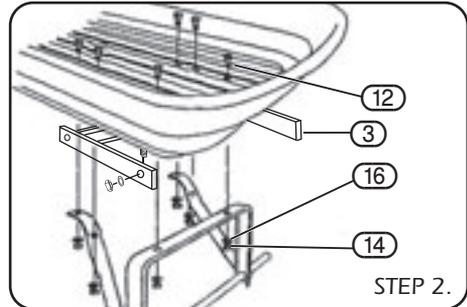


STEP 3.

Assemble lock to hopper using round head M8 x 15 bolts (12). M8 lock nuts (14), ID 8mm washers (16).

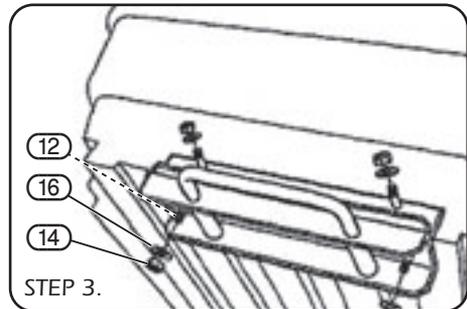


STEP 4.

Place hopper into the tipping position. Take the front axle and frame and slide it over the rear frame until the holes align. Secure using round head M8 x 20 bolts (18), M8 lock (14) and washers (16). Do not overtighten as this is the pivoting point.

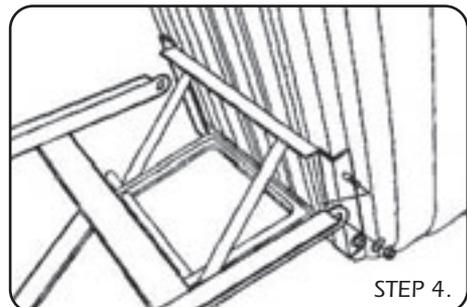


STEP 5.

Assemble the wheels using the M12 lock nuts (15), and washers (17).

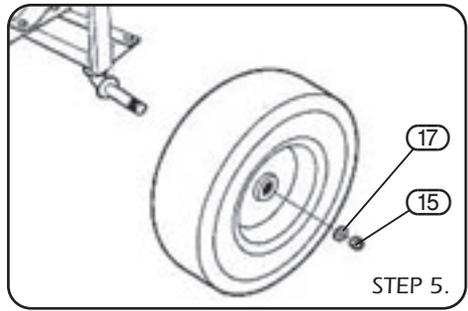

STEP 6.


Assemble the handle to the yoke using M8 x 60 bolt (13), M8 lock nut (14) and washer (16).

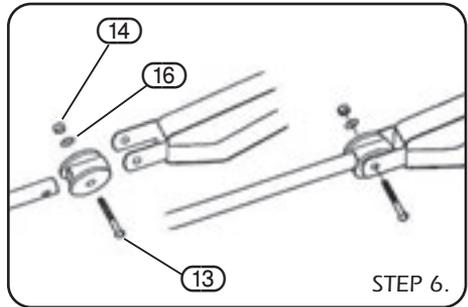

USING THE GARDEN CART


USING THE TIPPING FEATURE (Fig.1.):

To operate the tipping feature, pull the tipping release handle outward to release the plastic hopper from the locking mechanism. Lift up the release handle to rotate cart upward into the tipping position. It is advisable to chock the front wheels when tipping heavy loads to stop the cart moving.

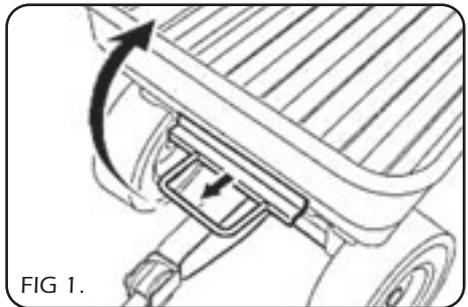

RETURNING THE PLASTIC HOPPER TO THE LOWERED POSITION (Fig.2.):

Rotate the plastic hopper back down to the lowered position. Make sure the tipping release handle is locked into place when the cart is in the lowered position.

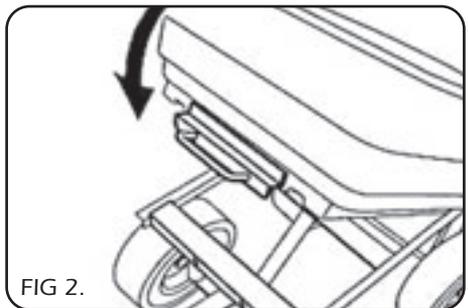

⚠ CAUTION:
DO NOT EXCEED MAXIMUM OVERALL LOAD CAPACITY: 150kg.
MAXIMUM TIPPING LOAD CAPACITY: 150kg.