



#### HD 6/13 CX Plus

Compact, high performance pressure washer with unique stand-up or lay-flat operating positon, large carry handle and built-in hose reel.

















- Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.
- At last work without getting tired: the EASY!Force high-pressure
- EASY!Lock quick-release locks: durable and robust. And five times faster than screws.

#### Mobility

- Integrated carrying handle on the front of the machine enables easy loading and convenient transport.
- Push handle can be retracted at the push of a button.

#### 3 Flexibility


- Vertical and horizontal operation possible.
- The wheels are not on in horizontal operation. In this way, the machine offers maximum stability.

#### Quality

- The automatic pressure relief protects the components and extends the service life.
- High-quality brass cylinder head.

### **TECHNICAL DATA AND EQUIPMENT.**



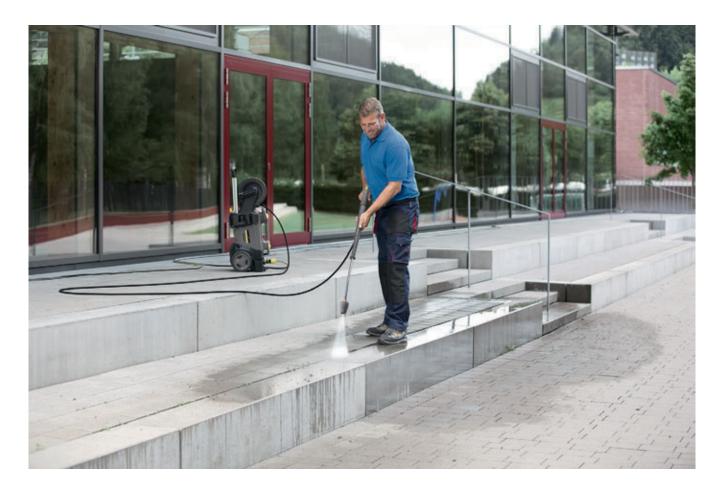

#### HD 6/13 CX Plus

- Automatic pressure relief
- For horizontal and vertical operation
- Save energy and time: EASY!Force high-pressure guns and EASY!Lock quick-release locks.

Technical data		
Order Number		1.520-955.0
EAN code		4054278164939
Current type	Ph / V / Hz	1 / 230 / 50
Flow rate	l/h	590
Operating pressure	bar / MPa	130 / 13
Max. pressure	bar / MPa	190 / 19
Max. water feed temperature	°C	bis zu 60
Power rating	kW	2,9
Weight	kg	27,5
Dimensions (L x W x H)	mm	380 × 370 × 930

Equipment		
Trigger gun		EASY!Force
High-pressure hose	m	15 / ID 6, 250 bar
Spray lance	mm	840
Triple nozzle (0°/25°/40°)		Manual
Dirt Blaster spray lance		
Integral high-pressure hose reel		1
Anti-twist system (AVS)		-
Pressure switch control		I
Servo Control		-

■ Included in delivery.





























-							
				Max. working			
		Order Number	ID	pressure	Length	Pric	e Description
Standard with unions on both sides	5					<u>'</u>	
High-pressure hose, 10 m DN 8,	1	6.110-031.0	ID 8	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection.
AVS trigger gun connector							With patented rotating AVS trigger gun connector and manu-
High-pressure hose, 15 m DN 8,	2	6.110-030.0	ID 8	315 bar	15 m		al coupling. Further data: DN 8/155°C/315 bar.  15 m high-pressure hose (M 22 x 1.5) with kink protection.
AVS trigger gun connector	_	0.110 030.0	15 0	313 501	15 111		With patented rotating AVS trigger gun connector and manu-
							al coupling. Further data: DN 8/155°C/315 bar.
High-pressure hose, 20 m DN 8,	3	6.110-032.0	ID 8	315 bar	20 m		20 m high-pressure hose (M 22 x 1.5) with kink protection.
AVS trigger gun connector							With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.
High-pressure hose, 30 m DN 8,	4	6.110-014.0	ID 8	315 bar	30 m		With rotary coupling 2 x M 22 x 15
including rotary coupling							With Total y cooping, 2 x W 22 x 1.5
High-pressure hose, 15 m DN 10,	5	6.110-042.0	ID 10	220 bar	15 m		15 m high-pressure hose M 22 x 1.5) with kink protection
220 bar, extension							and threaded couplings at both ends. Further data: DN 10/155°C/220 bar.
High-pressure hose, 20 m DN 10,	6	6.110-043.0	ID 10	220 bar	20 m		with union on both sides M 22 v 1.5 with anti-kink protec-
220 bar, extension							tion. NW 10/155°C/220 bar
High-pressure hose, 25 m DN 10,	7	6.110-044.0	ID 10	220 bar	25 m		
extension, not rotatable Hose assembly premium DN10	8	6.110-045.0	ID 10	220 bar	40 m		_
22MPa 40m	0	6.110-045.0	ID 10	220 Ddi	40 111		
Hose assembly premium DN12	9	6.110-059.0	ID 12	210 bar	15 m		High-pressure hose for water volumes greater than 1,800 l /
_21MPa 15m							h. With union on both sides. 2x M 22 x 1.5 with anti-kink
Hose assembly premium DN12 21MPa 40m	10	6.110-060.0	ID 12	210 bar	40 m		protection.
High-pressure hose, 10 m DN 6,	11	6.110-034.0	ID 6	250 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. ■
AVS trigger gun connector	12	6.110-035.0	ID 6	250 bar	10 m		With patented rotating AVS trigger gun connector and manu-
							al coupling. Further data: DN 6/155 C/250 bar.
High-pressure hose, 10 m, DN 6, 300 bar, AVS trigger gun connec-	13	6.110-056.0	ID 6	300 bar	10 m		With patented AVS connection in the trigger gun (pivot-mounted) and hand screw union. M 22 x 1.5 with anti-kink
tion							protection. NW 6/155°C/300 bar
Longlife 400 with unions on both s	ides						
High-pressure hose Longlife 400,	14	6.110-023.0	ID 8	400 bar	30 m		With rotary coupling, 2 x M 22 x 1.5
30 m DN 8, including rotary coup-							<b>▲</b>
ling High-pressure hose Longlife 400,	15	6.110-027.0	ID 8	400 bar	20 m		with rotary coupling, 2 x M 22 x 1.5
20 m, DN 8, extension	15	0.110 027.0	10 0	100 501	20 111		With Total y Coopinio, 2 x W 22 x 1.5
High-pressure hose Longlife 400,	16	6.110-029.0	ID 8	400 bar	15 m		With rotary coupling, 2 x M 22 x 1.5
15 m, DN 8, including rotary coup-							
ling High-pressure hose 1.5 m, DN 8,	17	6.110-024.0	ID 8	400 bar	1,5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink pro-
including connectors	17	0.110 024.0	10 0	400 bui	1,5 111		tection and connectors at both ends. For connecting to hose
							reels with appropriate connector (M 22 x 1.5).
High-pressure hose packaged		6.110-038.0	ID 8	400 bar	10 m		
Food industry version with unions	r.	1	ID 0	250 har	10		10 m high process we have (DNI O) with potential (notation)
High-pressure hose, 10 m ID 8, suitable for food industry, extensi-	19	6.110-051.0	ID 8	250 bar	10 m		10 m high-pressure hose (DN 8) with patented (rotating)  AVS trigger gun connector. Non-discolouring outer layer for
on piece							use in the food industry. M 22 x 1.5 with anti-kink sleeve.
High-pressure hose, 20 m ID 8,	20	6.110-052.0	ID 8	250 bar	20 m		20 m high-pressure hose (DN 8) with swivel coupling. Non-
suitable for food industry, extensi-							discolouring outer layer for use in the food industry. Con-
on piece							nectors at both ends, M 22 x 1.5, with kink protection. NW 8/155°C/250 bar.
				1			5/ 155 C/ 250 Bull.









		Order Number	ID	Max. working pressure	Length	Price	Description	
High-pressure hose 15 m ID 6, AVS trigger gun connector 11 mm, suitable for food industry, grey	21	6.110-063.0	ID 6	250 bar	15 m		15 m high-pressure hose (DN 6) with patented (rotating) AVS trigger gun connector. Non-discolouring outer layer for use in the food industry. DN 6/155°C/250 bar.	
Longlife food industry version with	unior	s on both sides						
High pressure hose food DN 8 / 10 m	22	6.110-053.0	ID 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außende- cke## animal-grease-resistant, non-colour-bleeding materi- al. With rotary coupling, 2 x M 22 x 1,5	•
HIgh-pressure hose Longlife 400, 15 m, ID 6, AVS trigger gun con- nection	23	6.110-054.0	ID 8	400 bar	20 m		Longlife HP hose for use in the food industry. Außende- cke## animal-grease-resistant, non-colour-bleeding materi- al. With patented AVS connection in the pistol (pivot moun- ted)	

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.









		Order Number	Flow rate		Price	Description	
Trigger guns							
Extended easy press trigger gun	1	4.118-005.0				Extended easy press high-pressure trigger gun for high- pressure hoses with rotating connector.	•
Quick connect	•						
Quick-fitting pipe union coupler trapezo	2	2.115-000.0					
Quick-fitting pipe union plug nipple tra	3	2.115-001.0					

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.









		Order Number	Max. working pressure	Nozzle size		Price	Description
Triple nozzles							
Triple nozzle 038	1	4.117-032.0	300 bar	38			Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.
Dirt Blaster, small							
	2	4.114-020.0	180 bar	40			
Dirt blaster, large							
Dirt blaster 04	3	4.114-041.0	300 bar	40			The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.





					1				Τ-
			Max. working						
		Order Number	_	Length			Price	Description	
Rotating spray lances							1		
Lance 850 mm, rotatable, ergonomic	1	4.112-006.0	300 bar	840 mm				850 mm stainless steel lance (manual coupling) with ergono mic handle for ease of use and protection. Rotatable 360° under pressure.	-
Lance 250 mm, non-rotatable	2	4.112-027.0	300 bar	250 mm					
550 mm lance, non-rotatable	3	4.112-024.0	300 bar	400 mm					
Rotatable lance, 600 mm, ergonomic	4	4.112-007.0	300 bar	600 mm				600 mm stainless steel lance (manual coupling) with ergono mic handle for ease of use and protection. Rotatable 360° under pressure.	
1050 mm lance, rotatable, ergonomic	5	4.112-000.0	300 bar	1050 mm				1050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360' under pressure.	. 🗆
Lance 1550 mm, rotatable, ergonomic	6	4.112-018.0	300 bar	1550 mm				1550 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360' under pressure.	° 🗆
Lance 2050 mm, rotatable, ergonomic	7	4.112-021.0	300 bar	2050 mm				2050 mm stainless steel lance (manual coupling) with ergo- nomic handle for ease of use and protection. Rotatable 360' under pressure.	· 🗆
Jet pipe extension TR 1000 mm	8	4.112-048.0	300 bar	1000 mm					
Angular spray lance									
WC and gutter lance	9	4.112-029.0						Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	
Flexible spray lance						,			
Flexible lance 1050 mm	10	4.112-035.0	210 bar	1050 mm				1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	
Telescopic spray lance	ı	l	ı	İ	I	ı	1		
Telescopic jet pipe	11	4.112-037.0	225 bar	5400 mm					
Restraint belt for telescopic jet pipe	12	6.373-987.0						Convenient strap for relief when working with the telesco- pic spray lance (6.394-690). The burden is optimally distri- buted on the body and longer periods of use are possible.	
Gutter cleaner		r	1	1	,	1	1		
Gutter cleaning lance	13	2.112-015.0		960 mm				The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	
Undercarriage spray lance				n					
Underbody lance	14	4.112-032.0		700 mm				Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	
Additional handle				1		,	1		
	15	4.321-380.0							
Power Control Strahlrohr			1		1	ı	1		
Pressure regulating jet pipe pa- ckaged Po	16	4.112-047.0							

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.





		Order Number			Price	Description	
Y distributor							
Y distributor	1	4.111-024.0					



























		Order Number	Flow rate	Nozzle size	Diame- ter	Price	Description
Hard surface cleaner FR Classic					1		
	1	2.111-016.0			300 mm		
Hard Surface Cleaner FRV 30						<u> </u>	
Add-on kit rubber lip	2	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes.
Extension hose 5 m	3	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included.
Add-on kit hose attachment	4	2.642-528.0					
Add-on kit dirt trap	5	2.642-532.0					
FRV 30	6	2.111-010.0					Surface cleaner with integrated waste water pick-up
Hard surface cleaner FR 30							
FR 30	7	2.111-011.0			300 mm		Hard surface cleaner FR 30
Hard surface cleaner FR 30 ME							
FR 30 ME surface cleaner	8	2.111-013.0			300 mm		Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.
Machine-specific nozzle kit for FR						·	
Nozzle kit for surface cleaners (type-specific) 500 - 650 l/h	9	2.640-401.0	500-650 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h).
Machine-specific nozzle kits for FF							
Nozzle kit 040 for FRV 30	10	2.642-431.0		40			
Machine-specific nozzle kits for FF	R Classic	c					
	11	2.885-312.0		40			
Hard surface cleaner FRV 30 Me							
Suction hose FRV 30 me	12	4.441-040.0					
FRV 30 ME	13	2.111-012.0					Surface cleaner with integrated waste water pick-up
Surface Cleaner FR 50 Me					*		
	14	2.111-024.0					

 $<sup>\</sup>blacksquare$  Included in delivery.  $\hfill\Box$  Available accessories.  $\hfill \blacktriangle$  Extension hose.































		Order Number				Price	Description	
Nozzle union								
Protection part TR only for replacement	1	4.112-011.0						[
Rotary coupling								
Rotary coupling	2	4.111-021.0					Kārcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 m. With grip protection.	
Coupling								
Coupler -2xM22x1,5	3	4.111-037.0					Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: $2x \text{ M } 22 \times 1.5 \text{ m}$ .	
Connector								
Nozzle connector/screw connector	4	4.111-022.0					Nozzle connector/screw connector for connecting high- pressure nozzles and accessories to the high-pressure trig- ger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	
	5	4.111-038.0						[
Adapter EASY!Lock								Ī
Adapter 1 M22AG-TR22AG	6	4.111-029.0						
Adapter 2 M22IG-TR22AG	7	4.111-030.0						[
Adapter 3 M22IG-TR22AG	8	4.111-031.0						[
Adapter M22 - Swivel	9	4.111-032.0					M22 x 1,5female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	-11
Adapter 5 TR22IG-M22AG	10	4.111-033.0						Е
Adapter 6 TR22IG-M22AG	11	4.111-034.0						[
Adapter 7 M18IG-TR20AG	12	4.111-035.0						[
Adapter 8 TR20IG-M18AG	13	4.111-036.0						[
ADAPTER for replacement TR22IG- M22AG Er	14	4.111-046.0						[
Machine-specific nozzle kit with or	der no	. 3.637-170		,				
Nozzle insert trapezoidal thread HD-GER.	15	4.769-005.0						[
Nozzle insert with order no. 3.637-					1			
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	16	4.769-003.0					Nozzle insert for detergent injector 3.637-001 for high- pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	
Low pressure for units rated up to 1100 l/h	17	4.769-001.0					For low pressure with machines up to 1.100 l/h	[

lacktriangle Included in delivery.  $\Box$  Available accessories. lacktriangle Extension hose.















		Order Number	Max. working pressure	Nozzle size	Diame- ter	Price	Description	
Barrel and tank cleaning					,			
	1	2.112-020.0						
Pipe cleaning hose, ID 6	1	ı.	I.	I.				
Hose assembly TR pipe cleaning DN6 max.2	2	6.110-046.0	250 bar					
Pipe cleaning hose, DN 6, 20 m, 220 bar	3	6.110-008.0	250 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes up to 220 bar (threaded connection for R 1/8 nozzle).	
Hose assembly TR pipe cleaning DN6 max.2	4	6.110-047.0	250 bar					
Hose assembly TR pipe cleaning DN6 14MPa	5	6.110-048.0	140 bar					
Pipe cleaning hose	6	6.110-049.0	140 bar				20 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	
Pipe cleaning hose, DN 6, 30 m	7	6.110-050.0	140 bar				30 m flexible high-pressure hose (DN 6) for cleaning pipes (threaded connection for R 1/8 nozzle).	
Pipe cleaning nozzle				1	,			
Drain cleaning dirt blaster D 25/040	8	6.415-944.0		40	25 mm		The forward-tilted rotating pencil jet removes the most stubborn dirt. The three backwards-tilted jets ensure the	
Drain cleaning dirt blaster D 30/040	9	6.415-946.0		40	30 mm		necessary forward movement, as well as convenient hand- ling.	
Drain cleaning dirt blaster D 35/040	10	6.415-948.0		40	35 mm			
Pipe cleaning nozzle	11	5.763-015.0		55	16 mm		16 mm pipe cleaning nozzle with internal thread. Various je	et 🗆
	12	5.763-020.0		65	16 mm		directions for environmentally-friendly cleaning of blocked drains and pipes.	
	13	5.763-017.0		50	30 mm		30 mm pipe cleaning nozzle with internal thread. Various je directions for environmentally-friendly cleaning of blocked drains and pipes.	
Rotating pipe cleaning nozzle	14	6.415-428.0		50	16 mm		Rotating pipe cleaning nozzle with internal thread and four rotating jets for environmentally-friendly cleaning of blocked drains and pipes.	

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.





		Order Number	Nozzle size		Price	Description
HP nozzle spray angle 0°						
High-pressure nozzle spray angle °0	1	2.113-001.0	40			High-pressure nozzle with powerful jet for extremely stubborn dirt.
Power nozzle spray angle 15°						
	2	2.113-044.0	38			
Power nozzle spray angle 25°						
Power nozzle spray angle 25°	3	2.113-006.0	38			Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.
Power nozzle spray angle 40°						
Power nozzle spray angle 40°	4	2.113-003.0	40			Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.

 $<sup>\</sup>blacksquare$  Included in delivery.  $\hfill\Box$  Available accessories.  $\hfill$  Extension hose.







		Order Number	Nozzle size			Price	Description
Wet blasting attachment (without i	nozzle)			1			
Wet blasting attachment with flow control (without nozzles)	1	4.115-000.0					Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.
Wet blasting attachment without flow control (nozzles not included)	2	4.115-006.0					Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.
Nozzle pack for wet blasting attach	ment						
Nozzle pack TR wet jet set 0040	3	2.112-019.0	40				
Boron carbide nozzle							
Boron carbide nozzle, for machi- nes as of 1000 l/h	4	6.415-084.0	6 mm				In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.

















		Order Number	Flow rate		Price	Description
Cup foam lance						
Foam lance TR	1	4.112-053.0	350-600 l/h			
Packing complete for 6.394-969.0	2	2.112-018.0				
Tank grey only for replacement 1L	3	6.414-050.0				
Tank 1L	4	6.414-954.0				
Inno Foam Set						
Inno foam kit with detergent injector	5	2.112-000.0				High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.
Easy Foam Set						
Easy Foam Set with RM injector	6	2.112-010.0				HP foam system for use with. HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.
Nozzle kits for Inno/Easy Foam Set						
Nozzle kit 060 for Inno/Easy Set 600 - 700 l/h	7	2.111-018.0	600-700 l/h			Optimal adaptation to different machine outputs for economic use. $\hfill\Box$
Foam nozzle mounting kit						
Foam nozzle kit	8	2.112-013.0				Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.

 $<sup>\</sup>blacksquare$  Included in delivery.  $\qed$  Available accessories.  $\ \blacktriangle$  Extension hose.



















		i						
		Order Number	Length			Price	Description	
Automatic, self-winding hose reels				1				
Add-on kit hose reel plastics	1	6.392-074.0	20 m				Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	
Add-on kit hose reel	2	6.392-083.0	20 m				Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	
Hose reel, automatic, 20 m, pain- ted	3	6.392-106.0	20 m				Automatic hose reel of durable plastic. Painted steel bracket Suitable for 20 m high-pressure hose.	
	4	6.392-105.0	20 m					
Hose reel, automatic, 20 m, stain- less steel	5	6.392-076.0	20 m				Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	
ABS hose reel stainless steel	6	6.392-122.0	20 m				High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrossion-resistant, watertight capsuled sprong drive.  Connection for HP hoses with nipple.	
Add-on kit hose reel TR 40m	7	6.392-442.0	40 m					
Swivel holder	8	2.639-931.0					Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose Rotatable 120°. Galvanised steel.	e. 🗆
ABS wall fastening stainless steel	9	2.641-867.0					Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.



















		Order Number	Length	Diameter		Price	Description	
Starting current limiter				1	,			
Starting current limiter	1	2.637-495.0					Reduces starting current in single-phase supply and protects line fuse.	
Geka coupling								
With hose nozzle, R 1/2"	2	6.388-461.0					with hose liner	
With hose nozzle, R 3/4"	3	6.388-455.0						
With hose nozzle, R 1"	4	6.388-465.0						
With female thread, R 3/4"	5	6.388-473.0					with female thread	
Suction filter			ı				,	
Water filter	6	6.414-956.0						
Suction filter with check valve	7	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	
Fine-mesh water filter								
Fine-mesh water filter with adapter	8	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles contained in the water. Water flow rate up to 1200 l/h. Connection 3/4", with adapter, 1".	
Water supply hose								
Water supply hose	9	4.440-038.0	7,5 m				NW 13 R1" / R 3/4", up to 30 °C	
	10	4.440-207.0	7,5 m				NW 19 R1" / R 3/4", up to 85 °C, for pick-up	
Backflow check valve							,	
Backflow preventer	11	2.641-374.0					To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.











		1	1				
		Order Number	Flow rate		Price	Description	
Push-on washing brush							
Push-on washing brush	1	4.762-497.0				With clamp for mounting directly to units' double or triple nozzle. Fits on new double and triple nozzles.	
Push-on wash brush, M 18 x 1.5	2	4.113-001.0				Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	
Rotating washing brush							
	3	4.113-004.0	500-800 l/h				
	4	4.113-003.0	500-800 l/h				

<sup>■</sup> Included in delivery. 

Available accessories. 

Extension hose.