
TWO REPLACEABLE BLADES

- Blades can be rotated 180° to give double the life of a conventional tool. Not recommended for plunge cutting unless ramped into workpiece.
- · Used for rough cutting only & have staggered blades.





Can be ramped down into workpiece when grooving.



107.0

RT/23

£74.48


mm

50.0

3/4

19.1



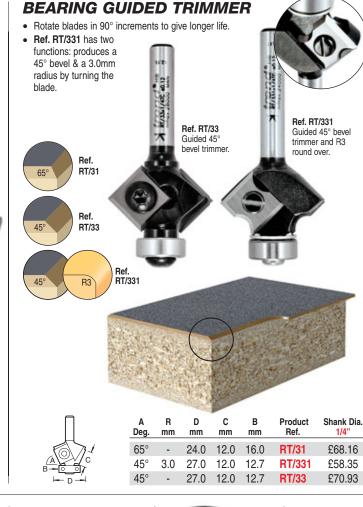







19.1

50.0

19.05

RT/72 £108.99

90°

3/4