

CONTRACTOR HINGE JIG

Patent No. GB2285410 with adjustable apertures.

The Hinge Jig is a portable template set designed for recessing hinges in wooden doors & frames. It is easy to use with minimal setting-up time, completing the job both accurately & quickly.

HINGE/JIG (single piece) _____ **£169.00**
H/JIG/A (two piece) _____ **£179.00**



Router not included.

Includes:

- 4 x Apertures
- 2 x Bradawls
- 1 x 16mm Guide Bush
- 1 x T-Handle Hex Key
- 1 x 4mm Spacing Gauge
- 1 x Plastic Storage Tube (with HINGE/JIG)
- OR
- 1 x Fabric Storage Case (with H/JIG/A)



H/JIG/A


Two piece hinge jig for easy handling.

NEW

Supplied in fabric case



See pages 190-191 Compatibility Chart

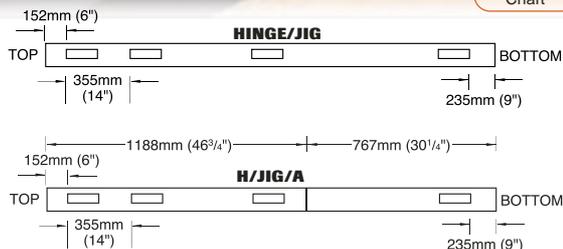

Specification:

| | |
|-----------------------------|---|
| Hinge sizes possible | |
| Length min. | 2 ⁵ / ₈ " (67mm) |
| Length max. | 5" (127mm) |
| Width min. | 3 ³ / ₈ " (9.5mm) |
| Width max. | 1 ³ / ₈ " (35mm) |
| Door sizes possible | |
| Height min. | 6' 5" (1955mm) |
| Height max. | 6' 10" (2100mm) |
| Thickness min. | 5 ⁸ / ₁₆ " (16mm) |

Replacement Parts:

- Replacement Special Guide Bush**
GB160 (dia. 16mm) **£7.50**
- Plastic Storage Tube**
CASE/HJ (for HINGE/JIG) **£12.00**
- Fabric Carry Case**
CASE/HJ/A (for H/JIG/A) **£14.50**

- Used on-site & in joinery shops to increase productivity with excellent results.
- Four apertures for fire door requirements.
- No need for marking out in the conventional way.
- Quick & simple to set-up as the hinge is used as the pattern.
- Clean & accurate recesses are achieved every time.
- Suitable for timber based doors & square butt hinges.
- Use with a light duty router with 1/4" collet.
- Long reach router cutter required, 12mm diameter with 70mm overall length.

Optional Accessory:

- Universal Sub-Base**
 Certain makes & models of router will require a Unibase to accept the guide bushes.
UNIBASE _____ **£13.00**
- Long Reach cutters**
3/8LX1/4TC _____ **£19.00**
C019AX1/4TC _____ **£13.00**
 Diameter 12mm
- NEW Low Profile Architrave Fitted Bush Kit**
HJ/1 _____ **£8.00**
 A pair of 3mm thick bushes so jig can be used where architrave is fitted 4mm back from lining.

To download Instruction Manual
 Visit: www.trendmachinery.co.uk

HOW IT WORKS:

Setting the Length



Setting the Width




Setting the Depth



Routing Hinge Recesses



Fitting the Door



CORNER CHISEL

For squaring corners on hinge recesses.

C/CHISEL _____ **£9.50**

- Squares up rounded corners in one operation.
- Use with a hammer.
- High Speed Steel (HSS) Anvil.
- For use with hinge and lock jigs.
- Can be re-sharpened.

